

3M X62w

3 M X 6 2 W



Brief Introduction
Beta 2.5

The 3M X62w standard portable LCD projector has 2500 Ansi lumens, a contrast of 500:1 and an XGA 1024 x 768 resolution. The projector is equipped with an integrated media player, so direct playback of files will not be a problem. The projector can illuminate a picture width of up to 435 cm thanks to its 2500 Ansi lumens. In room lighting, however, the picture width should ideally be less than 290 cm. The model was built by 3M in 2006 and is no longer current.

Display Type

 3 x 0,63" LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen
Contrast
Black Level
Offset

Projector	2500 / 2000 im Eco Mode	Screen	809 Lux (bei 203 cm Screen)
	500:1 full on/off		500:1 full on/off
	5,0000 min. Lumen		1.628 min. Lumen

Resolution

XGA 1024 x 768
786.432 Pixel
UXGA 1600 x 1200 compressed
PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Video Modes

Media player formats: • JPEG (.jpeg, .JPEG) • BMP (.bmp) • PNG (.png) • MPEG4 (.mp4)
Standard-Portabel | External training and company presentations, as well as product

Application

presentations.
Medium screen width or rooms with little light, max. 100 lumens.

Light Source

200W UHB Lamp
Articel Nr.: 78-6969-9875-2

Light Life

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=1,7-1,9 f=18,9-22,6 mm

Throw Ratio


1,48-1,77:1

Audio

1 x 1W

Connections

2 x D-sub 15pin in 1 x out
YUV in
Cinch Video in
S-Video in
Cinch Video in
Mini Jack in
RS232C Din 9 pin

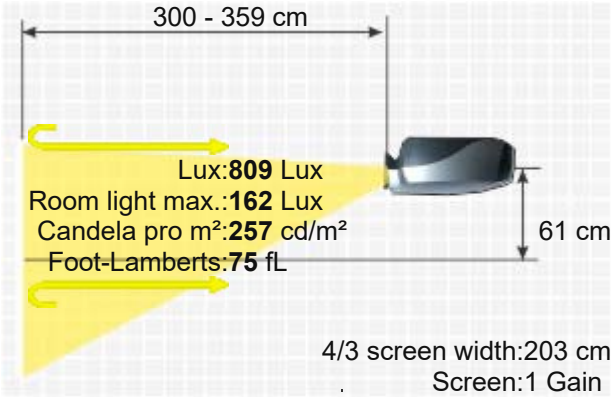

USB (Wireless Lan)
RJ45 in
SD Card, USB 2.0 Memory (jpeg, bmp, png, MPEG4)



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
310W
306 x 106 x 249 mm (12"x4,2"x9,8") 8,08 L/dm³
38 / 33 dB in Eco Mode

Weight
Keystone
Illumination

3,30 kg / 7,28 lbs.
Vert.: +/-15° automatisch
-

Frequenz

H-sync: 31,5-106 kHz
V-sync: 56-120 Hz

Foot-Lamberts

75 fL / max. 435 cm screen width
257 cd/m²

- Direkt Power Off
- Integrated Mediaplayer
- Freeze
- Blank (Black screen button)
- Blackboard Modus
- User logo
- Eco Mode
- Automatic and manual vertical keystone correction
- Kensington Slot
- Gamma correction
- Password protection
- Remote control with laser pointer und mouse control
- Control via web browser
- Wi-Fi network compatible.
- Lan network compatible.
- Overscan adjustable
- De-interlacer with 3:2 pull down..

Features

Optional

Lamp ruby	Ruby-LMP15635
Lamp incl. air filter original	78-6969-9875-2
Compatible lamp	LMP-K15635
Remote original	HL02881- R016F / HL03032 - R017H / HL02483
Air filter original	NJ22222
Ceiling Mount 100-120	Halterung100

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=d16983>
2006 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/3mx62w-en.html>