

Acer H6500

ACER H6500



The Acer H6500 BrilliantColor DLP home cinema projector has 2100 Ansi lumens, a contrast of 10000:1 and an HDTV 1920 x 1080 resolution. Due to the lamp, the projector is specified with 3500 hours of lamp life, which converts to over 4.8 years at 2 hours per day. The projector can illuminate a picture width of up to 466 cm well thanks to the 2100 Ansi lumens. In room light, however, the picture width should ideally be less than 311 cm. The projector can also display 1080P without any problems. The model was built by Acer in 2012 and is no longer current, but is still a popular projector in our database.



1 x 0,65 DC2 DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Projector

2100 / 1680 im Eco Mode
10000:1 full on/off
0,2100 min. Lumen

Screen

906 Lux (bei 203 cm Screen)
10000:1 full on/off
0.091 min. Lumen

Brief Introduction

Display Type

Ansi-Lumen

Contrast

Black Level Offset

Resolution

Video Modes

Disc Recognition

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

HDTV 1920 x 1080
2.073.600 Pixel
Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray
Homecinema | Medium screen width or rooms with little light, max. 100 lumens.
240W P-VIP Lamp
Articel Nr.: EC.JD500.001
3500 h. 5000 h. in Eco Mode

5,48% / 0,04 €

Manual

Manual 1,2

F=2,55-2,87 f=22,41-26,82 mm

1,5-1,8:1

1 x 2W

2 x HDMI in
D-sub 15 pin in
YUV in
Cinch Video in
12V Trigger



Ceiling Mounting

Yes



Power 305W
Size WxHxD 268 x 80 x 192 mm (10,6"x3,1"x7,6") 4,12 L/dm³
Operating Noise 34 / 28 dB in Eco Mode

Weight 2,54 kg / 5,6 lbs.
Keystone Vert.: +/-15° automatisch
Illumination 85%

Frequenz H-sync: 30-100 kHz
V-sync: 50-85 Hz

Foot-Lamberts 84 fL / max. 466 cm screen width
288 cd/m²


- Full HD 1080P compatible
- Blackboard Modus
- Eco Mode
- Automatic and manual vertical keystone correction
- Password protection
- BrilliantColor™
- 6-segment colour wheel and ACBII+ +
- digital zoom
- Acer ColorBoost II

Status 2012 Discontinued (EOL) // Last update of the data: 2023-08-04



HCinema

<https://www.projector-database.com/pro/acerh6500-en.html>

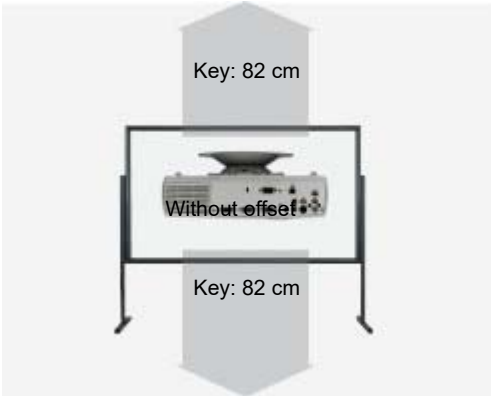

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.