

ASK Proxima C440

ASK PROXIMA C440



The ASK Proxima C440 stationary LCD projector has 3500 Ansi lumens, a contrast of 750:1 and an XGA 1024 x 768 resolution. The projector also offers a lens shift function for flexible projection adjustment without loss of quality. 515 cm image width, the projector will be able to illuminate well. Rooms with residual light can be created by the projector with a smaller image width, max. 343 cm is recommended here. The model was built by ASK Proxima in 2003 and is no longer current.

Brief Introduction

Beta 2.5

Display Type



3 x 0,99" LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen

3500 / 2800 im Eco Mode

1132 Lux (bei 203 cm Screen)

Contrast

750:1 full on/off

750:1 full on/off

Black Level

4,6667 min. Lumen

1.516 min. Lumen

Lens shift

Vert.: +50% -0%

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

UXGA 1600x1200 compressed

PAL, NTSC, SECAM EDTV 480p 576p HDTV 1080i, 720p

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

320W UHB Lamp

Articel Nr.: SP-LAMP-015

Light Life

1500 h.

Operating Costs

-

Focus

Powered

Zoom

Powered 1,47

Objective

-

Throw Ratio


1,5-2,2:1

Audio

2 x 1W

Connections

M1 DA in
D-sub 15pin in
YUV über 3 x BNC
Cinch Video in
Cinch Stereo in
S-Video in
Mini Jack in
RJ45 in
RS232C

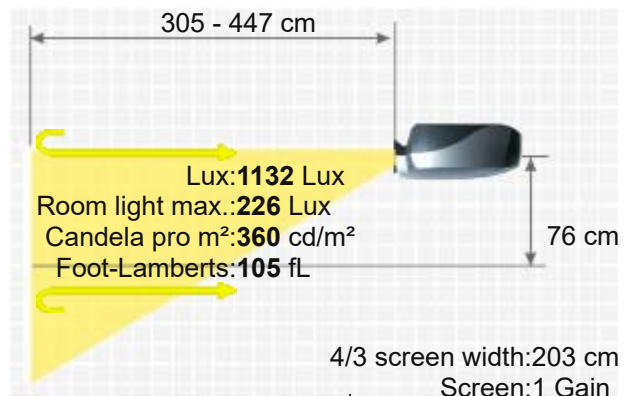

USB über M1 DA




Ceiling Mounting Yes
 Power 430W
 Size WxHxD 427 x 163 x 315 mm (16,8"x6,4"x12,4") 21,92 L/dm³
 Operating Noise 40 / 37 dB in Eco Mode

Weight 7,70 kg / 16,98 lbs.
 Keystone Vert.: +/-15°
 Hori.: +/-10°
 Illumination 85%
 Frequenz H-sync: 15-100 kHz
 V-sync: 43-120 Hz
 Range max.: 160 MHz
 Foot-Lamberts 105 fL / max. 515 cm screen width
 360 cd/m²

- Lens shift Funktion
- Freeze
- Eco Mode
- Kensington Slot
- Picture-in-Picture
- Remote control with mouse control
- Optional Wi-Fi network compatible.
- Lan network compatible.
- Digital Zoom
- Pin code security system
- De-interlacer

Lamp ruby Ruby-LMP408
 Lamp incl. air filter original SP-LAMP-015
 Compatible lamp LMP-K1931
 Universal Remote original Fernb-uni-V3
 Remote control original HL02198
 Air filter original NJ08081
 Ceiling Mount 100-120 Halterung100

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=d408>

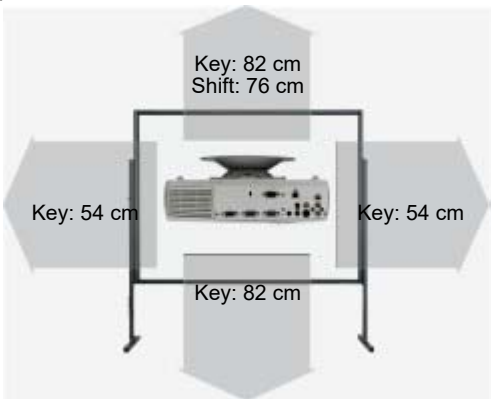

Optional Lenses						
Name	Ratio	Distance	Shift V	Shift H	Zoom	
Zoom Optional Lenses						
ASK Proxima Lens-025	3.9-7.3:1	7.9-14.8 m	50%		Powered	
ASK Proxima Lens-024	2.2-4.1:1	4.5-8.3 m	50%		Powered	
ASK Proxima Lens-023	1.1-1.5:1	2.2-3 m	50%		Powered	
Fix Optional Lenses						
ASK Proxima Lens-022	0.8:1	1.6 m	0.0% Fix		No Zoom	
Status	2003 Discontinued (EOL) // Last update of the data: 2023-10-26					

Data





HCinema

<https://www.projector-database.com/pro/askproximac440-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.