

Barco F35 WQXGA



BARCO F35 WQXGA



The Barco F35 WQXGA 3D BrilliantColor DLP projector has 6500 Ansi lumens, a contrast of 8000:1 and a WQXGA 2560 x 1600 resolution. A picture width of up to 702 cm is possible, if the picture width is smaller (we recommend max. 468 cm), rooms with residual light are also no problem. If the image width is not sufficient, the projector offers integrated edge blending software, which allows several projectors to project a large image together. The model is also Full HD 1080P compatible. The model was built by Barco in 2009 and is no longer current.

Brief Introduction

Display Type

 DLP Chip
WQXGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 6500 Screen 2167 Lux (bei 200 cm Screen)

Contrast

8000:1

Black Level

0,8125 min. Lumen

Offset

-

Resolution

WQXGA 2560 x 1600
4.096.000 Pixel

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

3D Compatibility

Side-by-Side | Frame Sequential (3D Ready)

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

2 x 300W Lamp
Articel Nr.: R9801272 / 400-0400-00 /
400-0500-00

Light Life

2000 h. 5000 h. in Eco Mode

Operating Costs

22,26% / 0,73 €

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

No

Connections

2 x HDMI 1.3a in
2 x DVI in
2 x D-sub 15 pin in
YUV in
2 x RS232C
RJ45 in

Ceiling Mounting

Yes

Power

1050W

Size WxHxD

376 x 223 x 510 mm (14,8"x8,8"x20,1") 42,76 L/dm³

Operating Noise


-

Weight

12,50 kg / 27,56 lbs.

Keystone

-

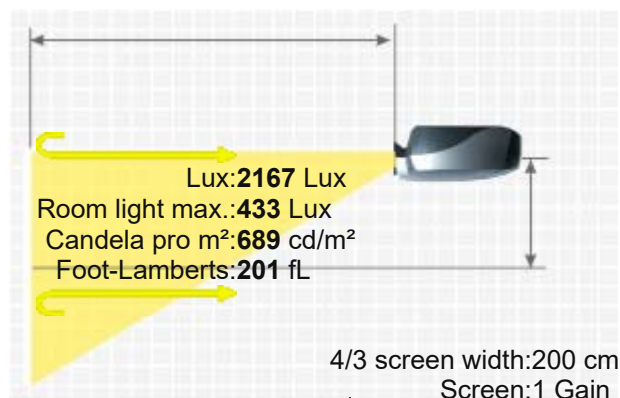

Illumination

-

Frequenz

H-sync: 15-150 kHz
V-sync: 48-190 Hz

Foot-Lamberts

201 fL / max. 702 cm screen width
689 cd/m²
■ Full HD 1080P compatible
■ Eco Mode
■ Kensington Slot
■ Gamma correction

Features

■ 24/7 continuous operation capable
■ Edge Blending
■ BrilliantColor™
■ Lan network compatible.
■ Colour wheels:High Brightness / VizSim Bright / VizSim

Optional

Bulb only

NLMP5064

Lamp ruby

Ruby-LMP5064

Lamp original

R9801272 / 400-0400-00 / 400-0500-00

Compatible lamp

LMP-K15468

Ceiling Mount 220

Halterung45

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n20476>

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
EN 44	2.5-4.5:1	5-9 m			
EN 43	1.2-1.7:1	2.4-3.4 m			Powered
EN 41	1.7-2.5:1	3.4-5 m			
Fix Optional Lenses					
EN 42	0.8:1	1.6 m	0.0% Fix		No Zoom

Status

2009 Discontinued (EOL) // Last update of the data: 2023-08-04

Data

Created: 2014-07-24 14:12:53

More Details



HCinema

<https://www.projector-database.com/pro/barcof35WQXGA-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.