

Benq HT1070A

BENQ HT1070A



The Benq HT1070A home cinema 3D BrilliantColor DLP projector has 2200 Ansi lumens, a contrast of 15000:1 and an HDTV 1920 x 1080 resolution. The lamp life is specified by the manufacturer as 10000 hours, which converts to over 13.7 years at 2 hours per day. Due to the brightness of 2200 Ansi lumens, a picture width of 477 cm is possible. In room light, the picture should be max. 318 cm wide. A smartphone with MHL connection can be connected directly to the MHL/HDMI port for 1080p / 60 Hz image mirroring (screen mirroring). It is also Full HD 1080P and 3D compatible. The model was built by Benq in 2017 and is no longer current.

Brief Introduction

Display Type

1 x DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

2200

978 Lux (200 cm Screen width)

Contrast

15000:1 full on/off

15000:1 full on/off

Black Level

0,1467 min. Lumen

0,065 min. Lumen

Offset

Resolution

HDTV 1920 x 1080

2.073.600 Pixel

WUXGA 1920 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Application

Homecinema | Medium screen width or rooms with little light, max. 100 lumens.

Light Source

210W Lamp

Light Life

Article Nr.: 5J.J0W05.001

4500 h. 10000 h. in Eco Mode

Operating Costs

6,35% / 0,04 €

Focus

Manual

Zoom

Manual 1,2

Objective

F=2,42-2,62 f=19,0-22,65 mm

Throw Ratio

1,28-1,56:1

Audio


1 x 2W

Connections

2 x HDMI mit MHL in
D-sub 15pin in
Cinch Video in
Mini Jack Audio in und out
USB Typ mini B in
RS232C Din 9 pin in

Ceiling Mounting

Yes, is possible.

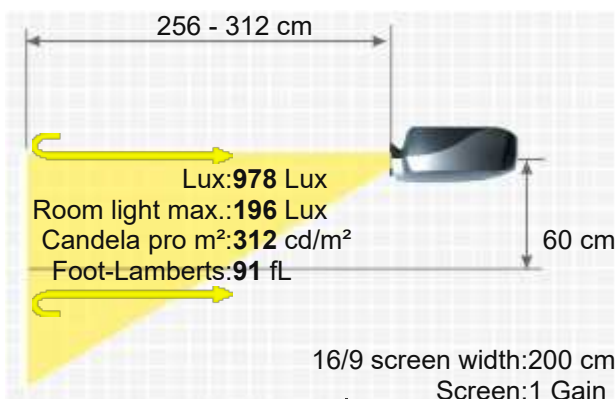

Power

Size WxHxD

Operating Noise

260W / 211W Eco Mode

332,4 x 99 x 241,3 mm (13,1"x3,9"x9,5") 7,92 L/dm³

33 / 31 dB in Eco Mode

Key: 275 cm

Weight

Keystone Illumination

2,56 kg / 5,64 lbs.

Vert.: +/-40° automatisch

-

Frequenz

Foot-Lamberts

H-sync: 15-102 kHz

V-sync: 23-120 Hz

91 fL / max. 477 cm screen width

312 cd/m²

Features

Screen Mirroring

■ Real Full HD 3D

■ Full HD 1080P compatible

■ Eco Mode

■ Automatic and manual vertical keystone correction

■ Kensington Slot

■ Password protection

■ BrilliantColor™

über HDMI MHL

Key: 155 cm

Optional accessories			
	Nackte Osram Lampe	NLMP25015	58,61 €
	Lampe Original	5J.JG705.001	172,18 €
	Lampe Ruby	Ruby-LMP25015	93,96 €
	Universal Fernbedienung	Fernb-uni-V3	22,31 €
	Fernbedienung Original	5J.JH106.001	33,22 €
	Lampe B-Ware	5J.JG705.001	141,79 €
	Deckenhalterung 100-120	Halterung100	47,86 €

Status

2017 Discontinued (EOL) // Last update of the data: 2026-05-05
Created: 2017-10-21 12:17:31



More Details



HCinema

<https://www.projector-database.com/pro/benqht1070a-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.