

Benq MS513P

BENQ MS513P



Brief Introduction

Beta 2.5

The MS513P 3D BrilliantColor DLP projector from Benq has 2700 Ansi lumens, a contrast of 13000:1 and an SVGA 800 x 600 resolution. The lamp life is specified by the manufacturer as 4500 hours, which converts to over 6.2 years at 2 hours per day. Due to the brightness of 2700 Ansi lumens, a picture width of 453 cm is possible. In room light, the picture should be max. 302 cm wide. It is also Full HD 1080P compatible. The projector is very quiet compared to others with an operating noise of 30 decibels. The model was built by Benq in 2012 and is no longer current.

Display Type

1 x DLP Chip
SVGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

2700 900 Lux (bei 200 cm Screen)

Contrast

13000:1 full on/off 13000:1 full on/off

Black Level

0,2077 min. Lumen 0,069 min. Lumen

Offset

SVGA 800 x 600
480.000 Pixel
PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Frame Sequential (3D Ready)

3D Compatibility

Standard-Portabel | External training and company presentations, as well as product presentations.

Application

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

190W Lamp
Articel Nr.: 5J.J6H05.001

Light Life

4500 h. 6000 h. in Eco Mode

Operating Costs

9,52% / 0,04 €

Focus

Manual

Zoom

Manual 1,1

Objective

F=2,57-2,65 f=21,0-23,10 mm

Throw Ratio

1,86-2,04:1

Audio


1 x 2W

Connections

HDMI in
2 x D-sub 15 pin in 1 x out
S-Video in
Cinch Video in
USB Typ B
RS232C Din 9 pin in
Mini Jack Audio in und out

Ceiling Mounting

Yes

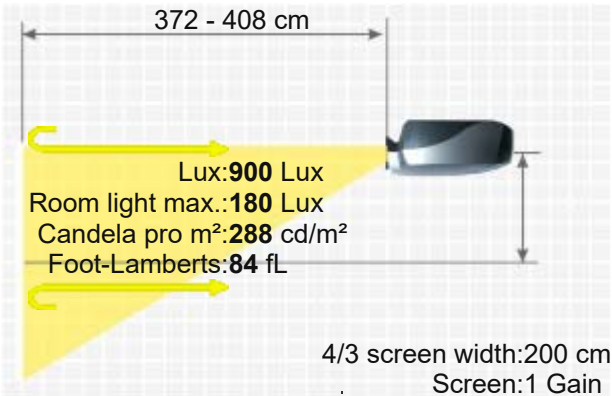

Power 265W
Size WxHxD 287 x 114 x 233 mm (11,3"x4,5"x9,2") 7,62 L/dm³
Operating Noise 30 / 26 dB in Eco Mode

Weight 2,50 kg / 5,51 lbs.
Keystone Vert.: +/-40°
Illumination -

Frequenz H-sync: 31-102 kHz
V-sync: 23-120 Hz

Foot-Lamberts 84 fL / max. 453 cm screen width
288 cd/m²

- Full HD 1080P compatible
- Freeze
- Blank (Black screen button)
- Blackboard Modus
- Eco Mode
- Kensington Slot
- sRGB
- Password protection
- BrilliantColor™
- Digital Zoom
- 6-segment colour wheel (RYWCBG)


Status 2012 Discontinued (EOL) // Last update of the data: 2023-08-04
Data

More Details



HCinema

<https://www.projector-database.com/pro/benqms513p-en.html>

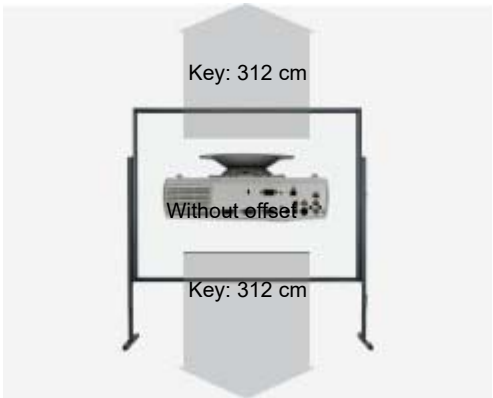

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.