

Benq MS524E

BENQ MS524E



Brief Introduction

Beta 2.5

With the MS524E, manufacturer Benq offers a DLP projector with SVGA 800 x 600 resolution and a contrast of 13000:1. The manufacturer Benq specifies a lamp life of 10000 hours, which is over 13.7 years with a daily viewing time of 2 hours. 493 cm picture width, the projector will be able to illuminate well. However, if room light is available, the picture width should ideally not exceed 329 cm. It is also Full HD 1080P and 3D compatible. The model was built by Benq in 2014 and is no longer current.



1 x DLP Chip
SVGA 4/3 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

3200

1067 Lux (bei 200 cm Screen)

Contrast

13000:1 full on/off

13000:1 full on/off

Black Level

0,2462 min. Lumen

0,082 min. Lumen

Offset

Resolution

SVGA 800 x 600

480.000 Pixel

Video Modes

UXGA 1600 x 1200 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

203W Lamp

Articel Nr.: 5J.JD705.001

Light Life

4500 h. 10000 in Eco Mode

Operating Costs

9,52% / 0,04 €

Focus

Manual

Zoom

Manual 1,1

Objective

F=2,51-2,69 f=22,08-24,28 mm

Throw Ratio

1,49-1,79:1

Audio

1 x 2W

Connections

HDMI in

2 x D-sub 15pin in 1 x out


Cinch Video in

S-Video in

Mini Jack Audio in und out

USB Typ B in

RS232C Din 9 pin in

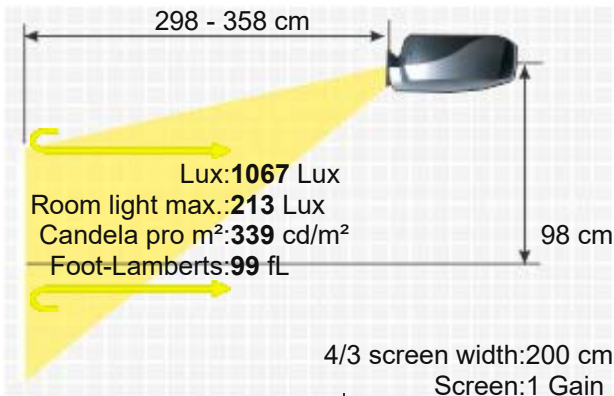

Ceiling Mounting Yes
Power 270 / 220W in Eco Mode
Size WxHxD 303 x 112 x 222 mm (11,9"x4,4"x8,7") 7,53 L/dm³
Operating Noise 33 / 31 dB in Eco Mode

Weight 2,30 kg / 5,07 lbs.
Keystone Vert.: +/-40°
Illumination -

Frequenz H-sync: 15-102 kHz
V-sync: 23-120 Hz

Foot-Lamberts 99 fL / max. 493 cm screen width
339 cd/m²

- Features
- Real Full HD 3D
 - Full HD 1080P compatible
 - Blackboard Modus
 - Eco Mode
 - Password protection
 - 6-segment colour wheel (RYWCBG)

Status 2014 Discontinued (EOL) // Last update of the data: 2023-08-04
Data Created: 2015-02-24 13:16:33

More Details



HCinema

<https://www.projector-database.com/pro/benqms524e-en.html>



Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.