


Benq MW883UST

BENQ MW883UST

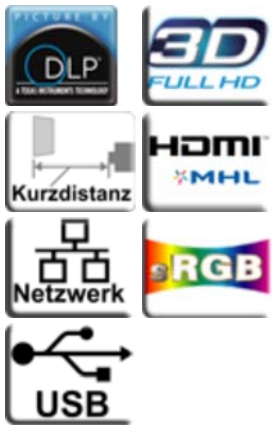

With the MW883UST, manufacturer Benq offers a short-throw DLP projector with WXGA 1280 x 800 resolution and a contrast of 10000:1. A built-in horizontal and vertical keystone correction provides freedom when positioning the projector. Thanks to the short throw projection ratio of just 0.24:1, the projector is not distracting in the room. For a 2m wide image, the projector only needs to be 48 cm away from the screen. A smartphone with an MHL connection can be connected directly to the MHL/HDMI port for 1080p / 60 Hz image mirroring (screen mirroring). Video signals 1080P and 3D are also no problem for the projector. The model was built by Benq in 2015 and is no longer current.

Brief Introduction

Beta 2.5

Display Type



1 x DLP Chip

WXGA 16/10 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 3300

Screen 1320 Lux (bei 200 cm Screen)

Contrast

10000:1 full on/off

10000:1 full on/off

Black Level

Offset 0,3300 min. Lumen

0,132 min. Lumen

Resolution

WXGA 1280 x 800

1.024.000 Pixel

UXGA 1600 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray (komprimiert) | 3D Blu-ray (komprimiert) | 4K UHD Blu-ray

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Application

Short Distance | Medium screen width or rooms with a little more ambient light, max. 200

lumens.

Light Source

240W Lamp

Articel Nr.: 5J.JDM05.001

Light Life

2500 h. 6000 in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

No Zoom

Objective

F=2,5 f=5,1mm

Throw Ratio

0,24:1

Audio

2 x 10W

Connections


HDMI mit MHL in

D-sub 15pin in und out

Cinch Video in

Cinch Stereo in

S-Video in

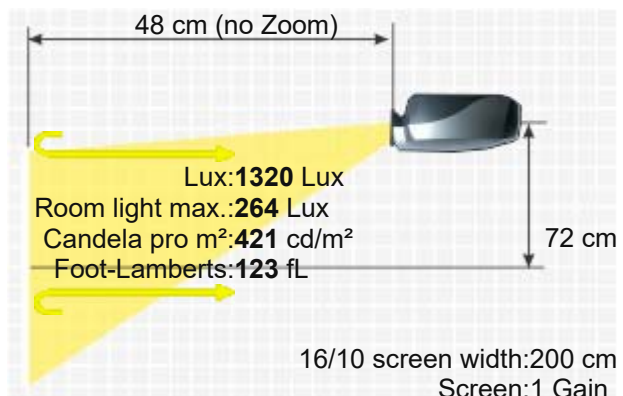

Mini Jack Audio in und out
 USB Typ A,B in
 RS232C Din 9 pin in
 RJ45 in



Ceiling Mounting Yes
 Power 490W
 Size WxHxD 385 x 152 x 429 mm (15,2"x6"x16,9") 25,11 L/dm³
 Operating Noise 37 / 33 dB in Eco Mode

Weight 8,00 kg / 17,64 lbs.
 Keystone Vert.: +/-30°
 Hori.: +/-25°

Illumination -

Frequenz H-sync: 10-102 kHz
 V-sync: 23-120 Hz


Foot-Lamberts 123 fL / max. 584 cm screen width
 421 cd/m²

- Real Full HD 3D
- Full HD 1080P compatible
- Eco Mode
- sRGB
- BrilliantColor™
- Lan network compatible.
- Short-throw projector

Optional Lamp original 5J.JDM05.001
 Remote control original 5J.JAD06.001 / 5J.JAC06.001 / RCE012 / RCE011

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=23489>
 2015 Discontinued (EOL) // Last update of the data: 2023-09-20
 Created: 2015-11-03 12:09:51

Data

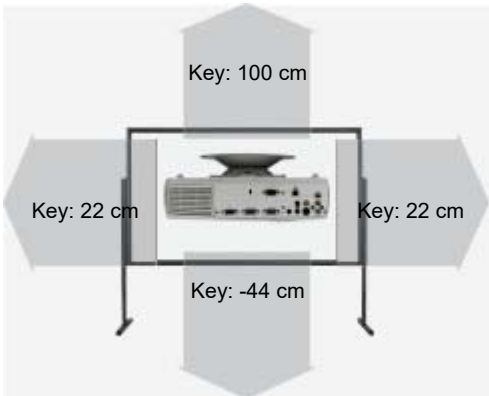

More Details



HCinema

<https://www.projector-database.com/pro/benqmw883ust-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.