

3M CD10X



3M CD10X



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

Status

Data

A brief introduction to the CD10X: The 3M DLP projector offers 1600 Ansi lumens, a contrast of 2000:1 and an XGA 1024 x 768 resolution. An image width of up to 348 cm is possible as the projector has 1600 Ansi lumens. However, if room light is available, the picture should be max. 232 cm wide. The projector was launched in 2010 and is no longer sold by the manufacturer.



1 x DDR DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Projector

1600

2000:1 full on/off

0,8000 min. Lumen

518 Lux (bei 203 cm Screen)

2000:1 full on/off

0.259 min. Lumen

Screen

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Micro-Portabel | Small mobile presentations..

Small screen width, rooms with very little ambient light below 100 lumens.

-

-

-

Manual

Manual

-

-

-

DVI-I mit HDCP in

USB in

mini S-Video in

-

190W

195 x 53 x 162 mm (7,7"x2,1"x6,4") 1,67 L/dm³

37dB

1,10 kg / 2,43 lbs.

Vert.: +/-15°

-

H-sync: 15-90 kHz


V-sync: 50-85 Hz

48 fL / max. 348 cm screen width

164 cd/m²

-

2010 Discontinued (EOL) // Last update of the data: 2023-08-04

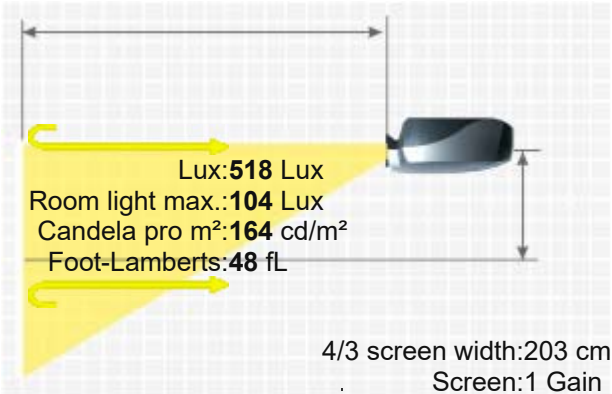



HCinema

<https://www.projector-database.com/pro/3mcd10x-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.