

Benq SH915

BENQ SH915



The Benq SH915 3D BrilliantColor DLP projector has 4000 Ansi lumens, a contrast of 11000:1 and an HDTV 1920 x 1080 resolution. A picture width of up to 643 cm is possible as the projector has 4000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 429 cm. Playing 1080P and 3D is also no problem for the projector. The model was built by Benq in 2014 and is no longer current.

Brief Introduction

Beta 2.5

Display Type



1 x DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

4000

1778 Lux (bei 200 cm Screen)

Contrast

11000:1 full on/off

11000:1 full on/off

Black Level

0,3636 min. Lumen

0,162 min. Lumen

Offset

Resolution

HDTV 1920 x 1080

2.073.600 Pixel

UXGA 1600 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Frame Sequential: Up to 480i Frame Packing: Up to 24 Hz 1080p Side by Side: Up to 60Hz 1080i Top Bottom: Up to 24Hz 1080p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

310W Lamp

Articel Nr.: 5J.J8805.001

Light Life

2500 h. 3500 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,52

Objective

F=2,42-2,97 f=20,7-31,05 mm

Throw Ratio


1,38-2,10:1

Audio

1 x 5W

Connections

2 x HDMI in
2 x D-sub 15pin in 1 x out
Cinch Video in
Cinch Stereo in
S-Video in
Mini Jack Audio in und out
USB Typ A,B in

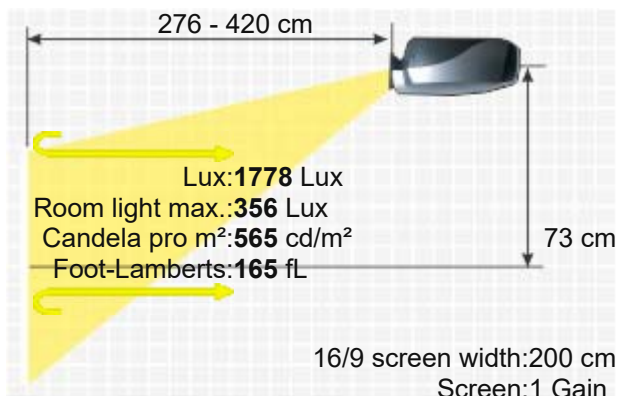

Ceiling Mounting
Power
Size WxHxD
Operating Noise

RS232C Din 9 pin in
RJ45 in
Yes
370W
360 x 120 x 259 mm (14,2"x4,7"x10,2") 11,19 L/dm³
38 / 33 dB in Eco Mode

Weight
Keystone
Illumination

3,70 kg / 8,16 lbs.
Vert.: +/-30°
-

Frequenz

-

Foot-Lamberts

165 fL / max. 643 cm screen width
565 cd/m²


- Features
- Real Full HD 3D
 - Full HD 1080P compatible
 - Eco Mode
 - Password protection
 - BrilliantColor™
 - Lan network compatible.
 - 2x digital zoom
 - 6-segment colour wheel

Optional

Remote control original 5J.JAD06.001 / 5J.JAC06.001 / RCE012 / RCE011
Lamp original 5J.J8805.001

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro22397>
2014 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2014-02-10 14:30:02

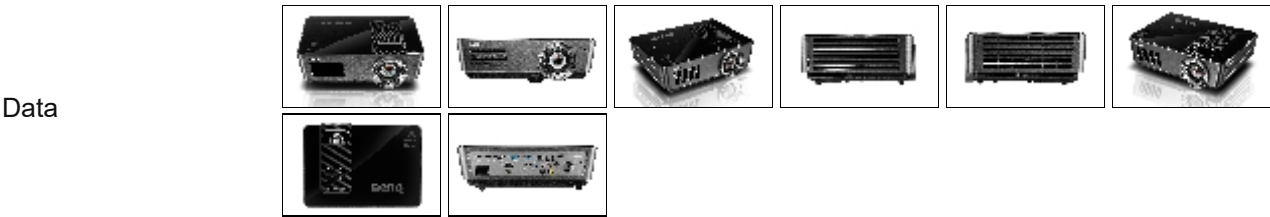

More Details



<https://www.projector-database.com/pro/benqsh915-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

