

Casio XJ H1700

CASIO XJ H1700



The Casio XJ H1700 3D laser DLP projector has 4000 Ansi lumens, a contrast of 1400:1 and an XGA 1024 x 768 resolution. The manufacturer Casio specifies a service life of 20000 hours, which is over 13.7 years if enjoyed for four hours a day. 551 cm picture width, the projector will be able to illuminate well. The projector can create rooms with residual light with a smaller image width, max. 367 cm is recommended here. The model is also Full HD 1080P compatible. The model was built by Casio in 2011 and is no longer current.

Brief Introduction

Beta 2.5

Display Type



1 x 0,7" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 4000 Screen 1333 Lux (bei 200 cm Screen)

Contrast

Projector 1400:1 full on/off Screen 1400:1 full on/off

Black Level

Projector 2,8571 min. Lumen Screen 0,954 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

UXGA 1600 x 1200 compressed

3D Compatibility

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Frame Sequential (3D Ready)

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

Laser- & LED-Hybrid-Technologie

Light Life

Articel Nr.: 10405309 / YT-120

20000 h.

Operating Costs

0,00 € LED

Focus

Manual

Zoom

Manual 1,19

Objective

-

Throw Ratio

1,60-1,91:1

Audio

10W

Connections

HDMI in

D-sub 15 pin in

S-Video in

Cinch Video in


Cinch Stereo in

Mini Jack Audio in und out

RS232C Din 9 pin in

Ceiling Mounting

Yes

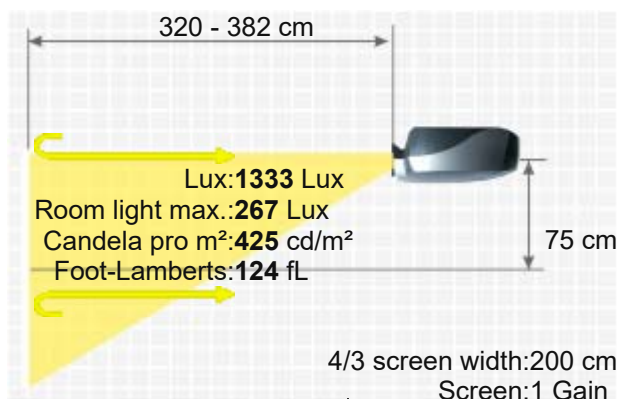

Power 430 / 350W in Eco Mode
Size WxHxD 400 x 106 x 323 mm (15,7"x4,2"x12,7") 13,7 L/dm³
Operating Noise 33 / 28 dB in Eco Mode

Weight 7,10 kg / 15,65 lbs.
Keystone Vert.: +/-30°
Illumination -

Frequenz -

Foot-Lamberts 124 fL / max. 551 cm screen width
425 cd/m²

- Full HD 1080P compatible
- Direkt Power Off
- Freeze
- Eco Mode
- Kensington Slot
- Password protection
- Crestron®-Software compatible.

Optional Remote control original 10405309 / YT-120

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=frop853103>
2011 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



<https://www.projector-database.com/pro/casioxjh1700-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.