

3M PL75X



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

A brief introduction to the 3M PL75X. The standard portable LCD projector has an XGA 1024 x 768 resolution and a contrast of 400:1. 3200 Ansi lumens ensure that a picture width of 493 cm is also possible. However, if room light is available, the picture should be max. 329 cm wide. This model is no longer offered by 3M.



3 x 0,79" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector

3200

400:1 full on/off

8,0000 min. Lumen

1035 Lux (bei 203 cm Screen)

400:1 full on/off

2.608 min. Lumen

Screen

XGA 1024 x 768
786.432 Pixel

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Articel Nr.: DT00691

2000 h.

-

Manual

Manual 1,2

F=1,7-2,1 f=24,3-29,2 mm

1,51-1,82:1

-

2 x D-sub 15 pin in 1 x out
S-Video in
Cinch Video in
Mini Jack Audio in und out

Yes

-

345,4 x 94 x 264,2 mm (13,6"x3,7"x10,4") 8,56 L/dm³

39dB

3,99 kg / 8,8 lbs.

-

-


-

Foot-Lamberts

96 fL / max. 493 cm screen width
329 cd/m²

Features

-

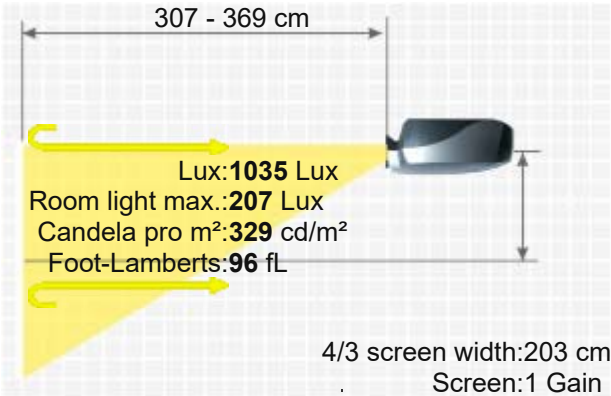

Optional

Lamp ruby	Ruby-LMP1773
Lamp original	DT00691
Compatible lamp	LMP-K16097
Universal Remote original	Fernb-uni-V3

Status
Data

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=d9001569>
- Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/3mpl75x-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.