

Christie DWX555-GS

CHRISTIE DWX555-GS



The DWX555-GS laser DLP projector from Christie has 5400 Ansi lumens, a contrast of 2000000:1 and a WXGA 1280 x 800 resolution. The lifespan is 20000 hours due to the laser, which converts to over 13.7 years at 4 hours per day. The projector also offers a lens shift function, which makes image adjustment childs play. Thanks to the brightness of 5400 Ansi lumens, a picture width of 747 cm is possible. The projector will also cope with slightly brighter rooms with a smaller image width (we recommend max. 498 cm). The model was built by Christie in 2014 and is no longer current.



1 x 0,65" Chip DLP
WXGA 16/10 Ti Digital Light Processing Chip

Projector	5400	Screen	2160 Lux (bei 200 cm Screen)
Contrast	2000000:1 full on/off		2000000:1 full on/off
Black Level	0,0027 min. Lumen		0,001 min. Lumen
Lens shift	Vert.: +/-50% Hori.: +/-15%		
Resolution	WXGA 1280 x 800		
Video Modes	1.024.000 Pixel		
Application	Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p		
Light Source	Stationary Permanent installation in the training room and meeting room as well as the conference room.		
Light Life	Wide screen width or rooms with plenty of light (over 200 lumens).		
	Solid state (laser phosphor)		
	20000 h.		

Operating Costs 0,00 € Laser

Focus Powered


Zoom Powered 1,25

Objective -

Throw Ratio 1,22-1,52:1

Audio Nein

Connections
HDMI x 1
DVI-D x 1
D-Sub 15 pin in und out
YUV in
S-Video in
Cinch Video in
USB Typ A,B in

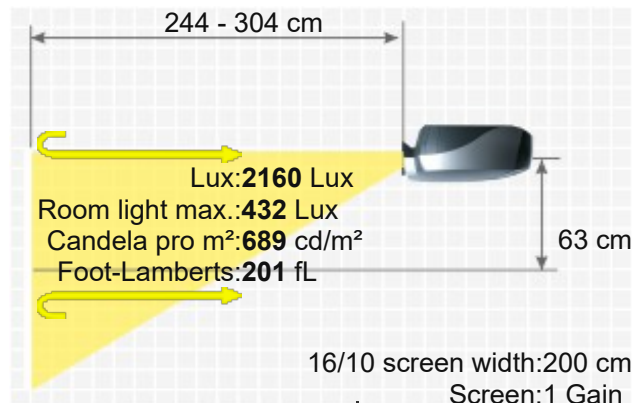

RJ45 mit HDBaseT in
RS232C




Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
520 /340W in Eco Mode
505 x 190 x 465 mm (19,9"x7,5"x18,3") 44,62 L/dm³
38 / 34 dB in Eco Mode

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts
Features
Screen Mirroring

15,90 kg / 35,05 lbs.
-
-
H-sync: 15-100 kHz
V-sync: 24-85 Hz
Range max.: 162 MHz
201 fL / max. 747 cm screen width
689 cd/m²
■ Lens shift Funktion
■ Eco Mode
■ Lan network compatible.

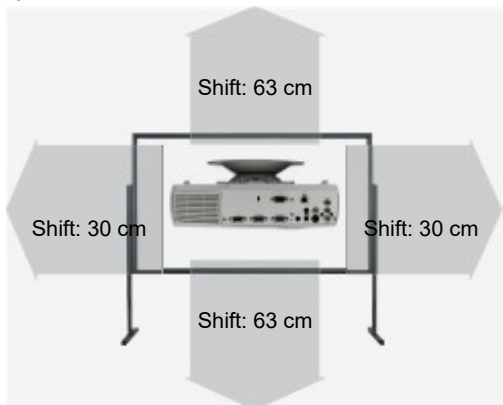

Optional accessories

	Fernbedienung Original	IR1081	41,95 €
	Deckenhalterung 220	Halterung45	83,60 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
140-107109-XX	3.04-5.78:1	6.1-11.6 m	+/-50%	+/-15%	Powered
140-102104-XX	1.6-3.07:1	3.2-6.1 m	+/-50%	+/-15%	Powered
140-101103-XX	1-1.28:1	2-2.6 m	+/-50%	+/-15%	Powered
140-100102-XX	1.28-1.6:1	2.6-3.2 m	+/-50%	+/-15%	Powered

Status 2014 Discontinued (EOL) // Last update of the data: 2025-03-03
Created: 2014-06-27 10:00:00

Data



More Details



HCinema

<https://www.projector-database.com/pro/christiedwx555gs-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice.
HCinema is not responsible for any errors or omissions contained in product descriptions.