

Digital Projection TITAN 1080p 330 3D P



Brief Introduction Beta 2.5

A brief introduction to the Digital Projection TITAN 1080p 330 3D P. The DLP projector has an HDTV 1920 x 1080 resolution and a contrast of 2000:1. Including a lens shift function, which provides freedom during installation. The projector can illuminate a screen width of up to 787 cm thanks to its 6000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 525 cm. If the image is still too small, the integrated edge blending software can help to project a larger image with additional projectors. Playing 1080P and 3D is also no problem for the projector. The model was built by Digital Projection in 2013 and is no longer current, but is still very popular in our projector database.

Display Type



3 x 0,95" DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

6000

2667 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

3,0000 min. Lumen

1,335 min. Lumen

Lens shift

Vert.: +70% -50% Hori.: +/-18%

Resolution

HDTV 1920 x 1080

2.073.600 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Application

Event | Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

330W Lamp

Light Life

Article Nr.: 109-319

1500 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

Nein

Connections

HDMI 1.4 in

DVI in

SDI in

D-sub 15pin in

4 x BNC YUV in

S-Video in

RJ45

RS232C

Ceiling Mounting

Yes, is possible.

Power


950W

Size WxHxD

664 x 253,3 x 568,5 mm (26,1"x10"x22,4") 95,42 L/dm³

Operating Noise

36dB

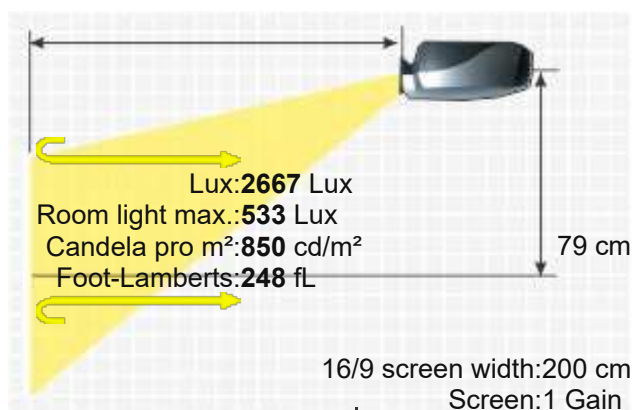

Weight

39,00 kg / 85,98 lbs.

Keystone	-
Illumination	86%
Frequenz	-
Foot-Lamberts	248 fL / max. 787 cm screen width 850 cd/m²
Features	■ Real Full HD 3D
	■ Full HD 1080P compatible
	■ Lens shift Funktion
	■ Freeze
	■ Eco Mode
	■ Gamma correction
	■ Edge Blending
	■ Picture-in-Picture
	■ Password protection
	■ Wi-Fi network compatible.
Screen Mirroring	■ Lan network compatible.
	■ Digital Zoom
	■ De-interlacer with 3:2 2:2 pull down.



Optional accessories			
	Deckenhalterung	HeavyDuty	378,28 €

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
109-236	1.16-1.49:1	2.3-3 m	+/-50%	+/-18%	
109-235	6.92-10.36:1	13.8-20.7 m	70-50%	+/-18%	
105-613	4.16-6.96:1	8.3-13.9 m	70-50%	+/-18%	
105-612	2.56-4.16:1	5.1-8.3 m	70-50%	+/-18%	
105-611	1.87-2.56:1	3.7-5.1 m	70-50%	+/-18%	Powered
105-610	1.39-1.87:1	2.8-3.7 m	70-50%	+/-18%	Powered
Fix Optional Lenses					
105-608	1.12:1	2.2 m	70-50%	+/-18%	
105-607	0.67:1	1.3 m	+/-10%	+/-10%	No Zoom

Status 2013 Discontinued (EOL) // Last update of the data: 2025-03-03
 Data Created: 2013-01-22 16:52:39

More Details



HCinema
<https://www.projector-database.com/pro/digitalprojectiontitan1080p3303dp-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.