POWER-PACKED

PICTURE-PERFECT

IMAGING TECHNOLOGY



BOXLIGHT

MP-650i

Introducing an **ALL-IN-ONE** projector that will dazzle any audience–the **BOXLIGHT MP-650i**. A strong 1800 lumen output and high resolution 1024 x 768 **XGA IMAGING** combine to capture the finest details and produce **HIGH-IMPACT IMAGES** with true-to-life colors. **PREMIUM FEATURES** like Picture in Picture and digital zoom enhance the viewer's experience while conveniences like the MP-650i's multiple inputs, laser remote and **PORTABILITY** make presenting virtually **HASSLE-FREE**. Call BOXLIGHT today and find out more about this multi-purpose wonder.

19332 Powder Hill Place
Poulsbo, Washington 98370
360.779.7901
www.boxlight.com


BOXLIGHT®
Presenting a Better Way

BOXLIGHT and the BOXLIGHT logo are registered trademarks of BOXLIGHT Corporation. © Copyright BOXLIGHT Corporation, 2000.
All other marks are the property of their respective owners. Specifications subject to change without notice. M1-MP-650IIN-08/00

B O X L I G H T

MP-650i

p r o j e c t o r

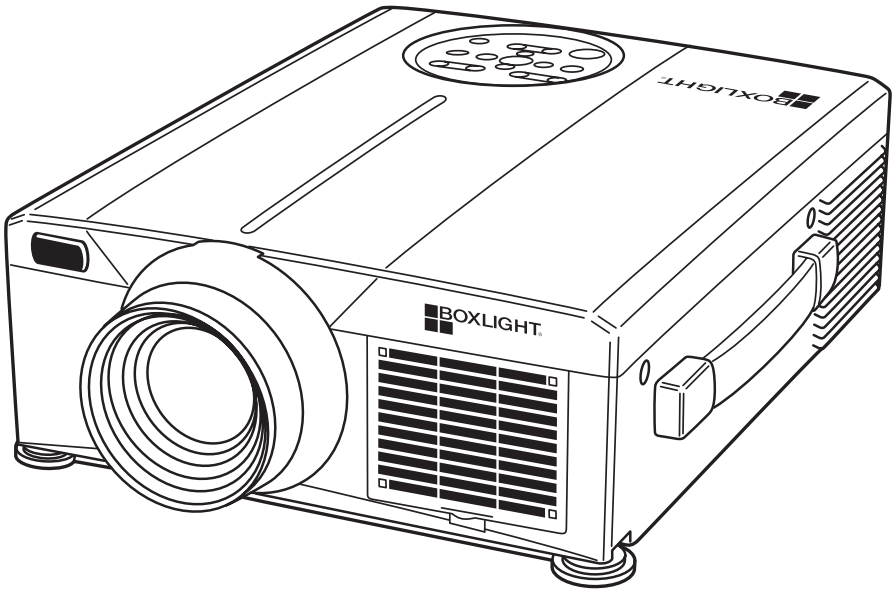

- *With 1800 ANSI lumens, images and colors are bright and true-to-life–even with the lights on.*
- *Picture in Picture feature allows for simultaneous viewing of computer and video images.*
- *Multiple connections allow the presenter flexibility with computers and peripherals.*
- *Create a square image in virtually any environment with Digital Keystone Adjustment.*
- *With just the touch of a button, digitally enhance an area on the screen through Digital Zoom Imaging from the remote control.*

BOXLIGHT®
Presenting a Better Way

19332 Powder Hill Place
Poulsbo, Washington 98370
360.779.7901
www.boxlight.com

Resolution	1024 x 768 true XGA and compressed 1280 x 1024 SXGA	**Weight**	5.9 kg
Brightness	1800 ANSI lumens	**Dimensions**	28.9 cm (W) x 11.9 cm (H) x 34.5 cm (D)
Lamp	190 watt UHB	**Projection Lens**	Motorized 1:1.3 zoom ratio, F/1.7-2.3 (f=49-64 mm)
Lamp life	2000 hours	**Diagonal Image Size**	0.76-7.6 m
Display Type	(3) 3.3 cm TFT polysilicon LCDs	**Throw Distance**	1.1-11 m
Contrast Ratio	300:1	**Keystone**	Digital adjustment of +/- 10%
Colors	16.7 million	**Adjustments**	On-board and remote
Aspect Ratio	4:3	**Power Supply**	100-240V AC, 50-60 Hz
Inputs	Audio/Video : (1) composite, (1) SVHS, (2) computer mini-jack audio	**Power Consumption**	320 watts
	Computer: (2) 15 pin	**Compatibility**	VGA, SVGA, XGA, SXGA, MAC
Outputs	(1) 15 pin monitor loop thru, (1) audio output, (1) control port for remote	**Warranty**	Two-year parts and labor (120-day lamp guarantee)
	mouse control, (1) USB control port for remote mouse control	**Accessories included**	Power cord (US & European), VGA cable, MAC adapter, RCA video cables, PS/2 mouse
Decibel	40 dB		cable, serial mouse cable, ADB (MAC) mouse cable, laser remote, lens cap
Audio	(2) built-in 1.2 watt speakers	**Accessories optional**	RS-232 control cable, S-VHS video cable, mini jack cable-audio, ceiling mount,
Video	NTSC, NTSC 4.43, PAL, PAL M, PAL N, SECAM		various carrying cases, Kensington lock