

Dukane ImagePro 6133W



DUKANE IMAGEPRO 6133W



With the ImagePro 6133W, manufacturer Dukane offers a short-throw LCD projector with WXGA 1280 x 800 resolution and a contrast of 3000:1. The integrated media player can play files directly. As it is a short-throw projector, the projector can be positioned very close to the wall. For a 2 m wide image, the projector needs to be just 72 cm away from the screen. The model was built by Dukane in 2014 and is no longer current.

 3 x 0,63" LCD TFT Panel mit MLA
WXGA 16/10 Liquid Crystal Display with Micro Lense Array

Projector 3300 Screen 1320 Lux (bei 200 cm Screen)

Contrast 3000:1 full on/off Screen 3000:1 full on/off

Black Level Offset 1,1000 min. Lumen Screen 0,44 min. Lumen

Resolution WXGA 1280 x 800

1.024.000 Pixel

WUXGA 1920 x 1200 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Media player formats: JPEG

DVD | HD Blu-ray (komprimiert) | 3D Blu-ray | 4K UHD Blu-ray

Application Short Distance | Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source 265 / 160W Lamp

Light Life 3000 h. 6000 h. in eco Mode

Operating Costs -

Focus Manual

Zoom No Zoom

Objective F=1,8 f=4,78mm

Throw Ratio 0,358:1

Audio 16W

2 x HDMI in

D-sub 15 pin in und out

S-Video in

Cinch Video in

Cinch Stereo in

Mini Jack Audio in und out

RS232C Din 9 pin in

USB Typ A, B in

RJ45 in

Ceiling Mounting Yes

Power 344W



Size WxHxD 378 x 112 x 428 mm (14,9"x4,4"x16,9") 18,12 L/dm³

Operating Noise 35 / 32 dB in Eco Mode

Weight 5,70 kg / 12,57 lbs.

Keystone Vert.: +/-10°

Illumination -

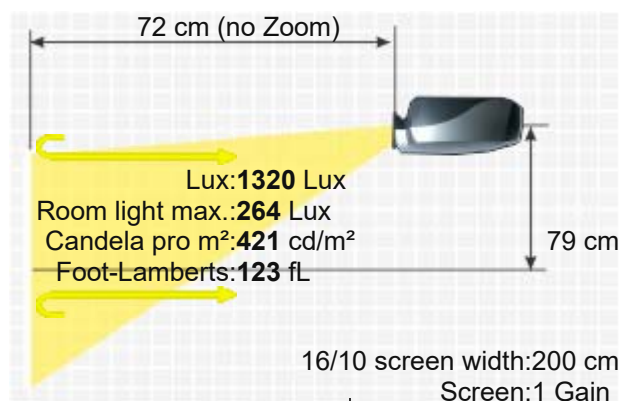

Frequenz H-sync: 15-100 kHz
V-sync: 50-120 Hz

Foot-Lamberts 123 fL / max. 584 cm screen width

421 cd/m²

- Direkt Power Off
- Integrated Mediaplayer
- Blackboard Modus
- User logo
- Eco Mode
- Password protection
- PJLink™
- Optional Wi-Fi network compatible.
- Lan network compatible.
- Short-throw projector
- Crestron®-Software compatible.
- DICOM simulation
- 1.4x digital zoom

Please note Offset und Projektionsverhältnis sind nach Objektivmitte.

Status 2014 Discontinued (EOL) // Last update of the data: 2023-08-04

Data Created: 2014-04-08 13:20:11



More Details



HCinema

<https://www.projector-database.com/pro/dukaneimagepro6133w-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.