

# Dukane ImagePro 6530B



DUKANE IMAGEPRO 6530B



A brief introduction to the ImagePro 6530B: The Dukane 3D BrilliantColor LCD projector offers 3000 Ansi lumens, a contrast of 12000:1 and an XGA 1024 x 768 resolution. The manufacturer specifies a lamp life of 4000 hours, which is over 5.5 years with a daily viewing time of 2 hours. The projector also offers an integrated media player that can be used to play files directly. Thanks to the horizontal and vertical keystone correction, the projector can be positioned very freely. A picture width of up to 477 cm is possible. However, the image should be smaller in room light. We recommend max. 318 cm. Video signals 1080P and 3D are also no problem for the projector. The model was built by Dukane in 2017 and is no longer current.

## Brief Introduction

Beta 2.5

## Display Type



1 x 0,63" LCD TFT Panel  
XGA 4/3 Liquid Crystal Display

## Ansi-Lumen

3000

1000 Lux (bei 200 cm Screen)

## Contrast

12000:1 full on/off

12000:1 full on/off

## Black Level

0,2500 min. Lumen

0,083 min. Lumen

## Offset

## Resolution

XGA 1024 x 768

786.432 Pixel

WUXGA 1920 x 1200 compressed

## Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

## 3D Compatibility

**Media player formats:** JPEG

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Standard-Portabel | External training and company presentations, as well as product presentations.

## Application

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

## Light Source

214 / 140W im Eco Mode Lamp

## Light Life

4000 h. 9000 in Eco Mode

## Operating Costs

-

## Focus

Manual

## Zoom

Manual 1,7

## Objective

F=1,7-2,1 f=17,5-29,0 mm

## Throw Ratio

1,3-2,2:1

## Audio

20W Mono

## Connections

2 x HDMI in

D-sub 15pin in und out

Cinch Video in


Cinch Stereo in

Mini Jack Audio in und out

USB Typ A,B in

RS232C Din 9 pin in

RJ45 in

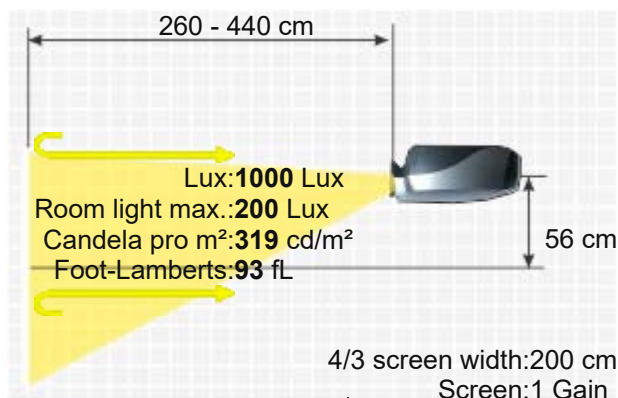



Ceiling Mounting      Yes  
 Power                    286W / 201W in Eco Mode  
 Size WxHxD            339 x 109 x 259 mm (13,3"x4,3"x10,2") 9,57 L/dm³  
 Operating Noise        35 / 29 dB in Eco Mode


Weight                    2,90 kg / 6,39 lbs.  
 Keystone                Vert.: +/-30°  
                               Hori.: +/-30°  
 Illumination            -

Frequenz                H-sync: 15-153 kHz  
                               V-sync: 24-120 Hz

Foot-Lamberts         93 fL / max. 477 cm screen width  
                               319 cd/m²

- Real Full HD 3D
- Full HD 1080P compatible
- Integrated Mediaplayer
- Freeze
- User logo
- Eco Mode
- Kensington Slot
- Password protection
- BrilliantColor™
- Lan network compatible.
- Crestron®-Software compatible.
- Digital Zoom
- Dicom Simulation

Status                    2017 Discontinued (EOL) // Last update of the data: 2023-08-04  
 Data                     Created: 2017-07-13 14:14:44

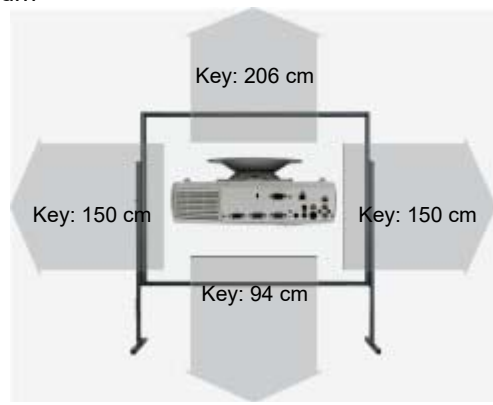

More Details



# HCinema

<https://www.projector-database.com/pro/dukaneimagepro6530B-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.