

Chisholm Aurora S500w

CHISHOLM AURORA S500W



Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level
Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

Status

Data

More Details

A brief introduction to the Aurora S500w: The Chisholm standard portable LCD projector offers 500 Ansi lumens, a contrast of 250:1 and an SVGA 800 x 600 resolution. Due to the brightness of 500 Ansi lumens, a picture width of 195 cm is possible. In room light, the picture should be max. 130 cm wide. It is no longer offered by the manufacturer Chisholm.



3 x 1,3 TFT Panel

SVGA 4/3 Liquid Crystal Display

Projector

500

250:1 full on/off

2,0000 min. Lumen

Screen

162 Lux (bei 203 cm Screen)

250:1 full on/off

0.656 min. Lumen

SVGA 800 x 600

480.000 Pixel

XGA 1024 x 768 compressed

NTSC, PAL, SECAM, NTSC

Standard-Portabel | External training and company presentations, as well as product presentations.

Very narrow picture width and rooms with very little light.

150W P-VIP Lamp

Articel Nr.: AURORA S500W

2000 h.

-

Manual

Manual 1,4

-

-

2 x 6W

D-sub 15pin in

Cinch Video in

S-Video

Yes

375W

-

-

-

-

-

H-sync: 15-47,5 kHz

V-sync: 50-75 Hz


Range max.: 60 MHz

15 fL / max. 195 cm screen width

51 cd/m²

-

- Discontinued (EOL) // Last update of the data: 2023-08-04

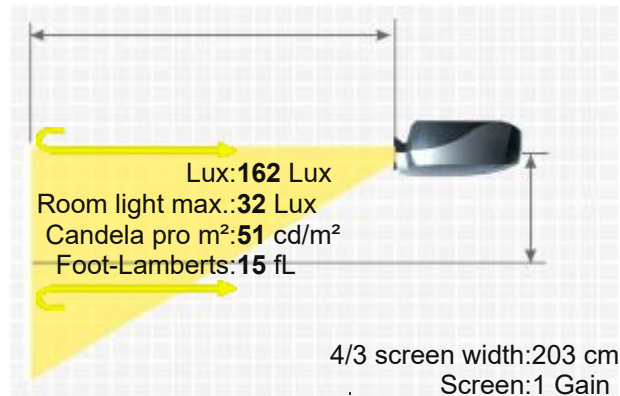

HCinema

<https://www.projector-database.com/pro/ChisholmAuroraS500w-en.html>

