


# Dukane ImagePro 8122WI

EAN/UPC:605194006779

DUKANE IMAGEPRO 8122WI



The Dukane ImagePro 8122WI is an LCD projector with WXGA 1280 x 800 resolution and a contrast of 20000:1. The horizontal and vertical keystone correction allows the projector to be positioned very freely. This projector has a projection ratio of just 0.2:1. For a 2 m wide image, the projector only needs to be 40 cm away from the screen. The model offers a microphone jack plug and 16W speakers, so no additional audio devices are required for presentations or training courses. A smartphone with an MHL connection can be connected directly to the MHL/HDMI port for 1080p / 60 Hz screen mirroring. Even 1080P video signals are no problem for the projector. The model was built by Dukane in 2018 and is no longer current.

 3 x 0,59" LCD TFT Panel  
WXGA 16/10 Liquid Crystal Display

Projector	3700	Screen	1480 Lux (bei 200 cm Screen)
Contrast	20000:1 full on/off		20000:1 full on/off
Black Level Offset	0,1850 min. Lumen		0,074 min. Lumen

Resolution  
WXGA 1280 x 800  
1.024.000 Pixel

Video Modes  
Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Disc Recognition  
DVD | HD Blu-ray (komprimiert) | 3D-Blu-ray | 4K-UHD-Blu-ray

Application  
Short Distance | Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source  
250W Lamp

Light Life  
2500 h. 4000 h. in Eco Mode

Operating Costs  
-

Focus  
Manual

Zoom  
No Zoom

Objective  
f=4,21mm

Throw Ratio  
0,2:1

Audio  
16W

Connections  
2 x HDMI in MHL  
2 x D-sub 15pin in 1 x out  
Cinch Video in  
Cinch Stereo in  
Mini Jack Audio in und out  
Microphone  
USB Typ A,B in



Brief Introduction  
Beta 2.5

RS232C Din 9 pin in  
RJ45 in



Ceiling Mounting Yes  
Power 380W  
Size WxHxD 377 x 136 x 360 mm (14,8"x5,4"x14,2") 18,46 L/dm<sup>3</sup>  
Operating Noise 36 / 29 dB in Eco Mode


Weight 4,30 kg / 9,48 lbs.  
Keystone Vert.: +/-5°  
Hori.: +/-5°  
Illumination -

Frequenz H-sync: 15-106 kHz  
V-sync: 50-120 Hz

Foot-Lamberts 137 fL / max. 618 cm screen width  
469 cd/m<sup>2</sup>

- Full HD 1080P compatible
- Eco Mode
- Kensington Slot
- Password protection
- PJLink™
- Lan network compatible.
- Short-throw projector
- Crestron®-Software compatible.
- DICOM simulation
- AMX

Status 2018 Discontinued (EOL) // Last update of the data: 2023-09-20  
Created: 2018-10-23 18:59:04

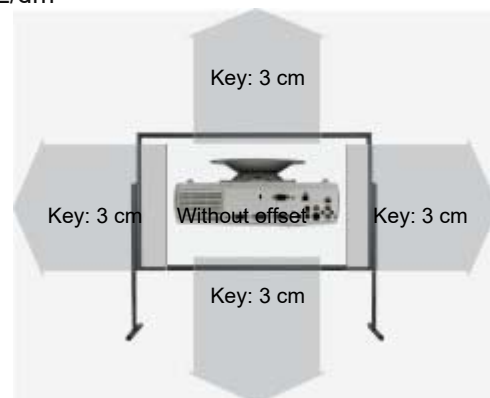

# HCinema

<https://www.projector-database.com/pro/dukaneimagepro8122wi-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.