


Dukane ImagePro 8807

DUKANE IMAGEPRO 8807



The Dukane ImagePro 8807 standard portable LCD projector has 4000 Ansi lumens, a contrast of 400:1 and an XGA 1024 x 768 resolution. Horizontal and vertical keystone correction makes image adjustment childs play. Thanks to the brightness of 4000 Ansi lumens, a picture width of 551 cm is possible. The projector will also cope with slightly brighter rooms with a smaller image width (we recommend max. 367 cm). The model was built by Dukane in 2006 and is no longer current.

Brief Introduction

Beta 2.5

Display Type



3 x 0,99" LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen

4000 / 3200 im Eco Mode

1333 Lux (bei 200 cm Screen)

Contrast

400:1 full on/off

400:1 full on/off

Black Level

10,0000 min. Lumen

3,358 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

250W Lamp

Articel Nr.: 456-8807

Light Life

2000 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,41

Objective

F=1,7-2,4

Throw Ratio

1,7-2,2:1

Audio

2 x 1W

Connections

DVI-I

D-sub 15pin in und out

YUV in

S-Video in

Cinch Video in

Cinch Stereo in

USB in

RS232C

Mini Jack in und out





Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
350W
268,3 x 119,4 x 275 mm (10,6"x4,7"x10,8") 8,77 L/dm³
39 / 35 dB in Eco Mode

Weight
Keystone
Illumination

5,90 kg / 13,01 lbs.
Vert.: +/-15°
Hori.: +/-10°
-

Frequenz

H-sync: 15-100 kHz
V-sync: 43-120 Hz

Foot-Lamberts

124 fL / max. 551 cm screen width
425 cd/m²


Features

- Freeze
- Eco Mode
- Kensington Slot
- Picture-in-Picture

Status

2006 Discontinued (EOL) // Last update of the data: 2023-08-04

Data

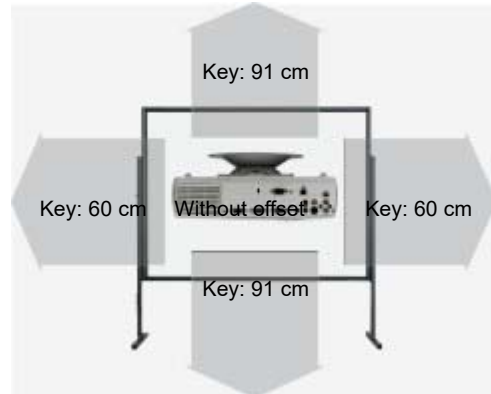

More Details



HCinema

<https://www.projector-database.com/pro/dukaneimagepro8807-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.