

Eiki LC XM2

EIKI LC XM2



Brief Introduction

Beta 2.5

With the LC XM2, manufacturer Eiki offers a standard portable LCD projector with XGA 1024 x 768 resolution and a contrast of 300:1. 1100 Ansi lumens ensure that a picture width of 289 cm is also possible. However, if room light is available, the picture should be max. 193 cm wide. The model was built by Eiki in 2001 and is no longer current.

Display Type



3 x 0,7 TFT Panel mit MLA

XGA 4/3 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen

1100

367 Lux (200 cm Screen width)

Contrast

300:1 full on/off

300:1 full on/off

Black Level

3,6667 min. Lumen

1,236 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

SXGA 1280 x 1024 compressed

NTSC, PAL, SECAM, NTSC 4.43, PAL-M & N

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

150W UHP Lamp

Light Life

Article Nr.: 610 295 5712

2000 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=1,7-1,9 f=28,8-34,5 mm

Throw Ratio

2,02-2,43:1

Audio

1 x 1W Stereo

Connections

D-sub 15 x 1, Stereo Mini-jack x 1, Mini Din8-pin x 1 (Maus control + serial port)

AV-Ausgänge RCA x 3 (Composite + Component)

Mini Din4-pin x 1 (S-Video)

Stereo Mini-jack x 1

Ceiling Mounting

-

Power


250W

Size WxHxD

257 x 75,8 x 230 mm (10,1"x3"x9,1") 4,43 L/dm³

Operating Noise

-

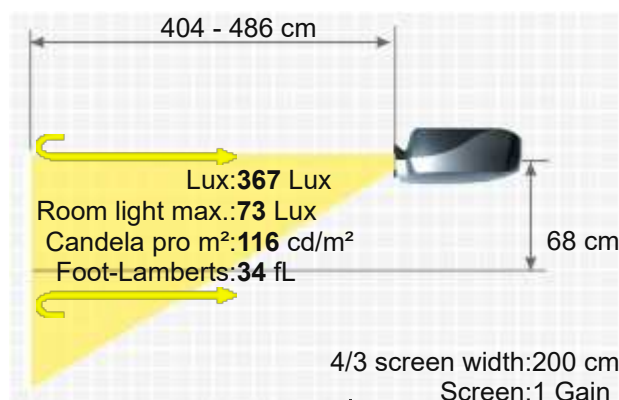

Weight	2,80 kg / 4,41 lbs.
Keystone	-
Illumination	-
Frequenz	H-sync: 15-100 kHz V-sync: 50-100 Hz Range max.: 140 MHz
Foot-Lamberts	34 fL / max. 289 cm screen width 116 cd/m²
Features	■ Freeze ■ Kensington Slot ■ Gamma correction ■
Screen Mirroring	-

Optional accessories

	Nackte Philips Lampe	NLMP3382	49,68 €
	Lampe Ruby	Ruby-LMP3382	119,24 €
	Lampe Original	610-295-5712 / LMP37 / 610-293-8210 / LMP36	EOL €
	Kompatible Lampe	LMP-K1316	54,50 €
	Fernbedienung Original	6451010766 / MXAT / CXZR	15,65 €
	Luftfilter universal	uni3mm	18,15 €

Status 2001 Discontinued (EOL) // Last update of the data: 2025-12-22



More Details



HCinema

<https://www.projector-database.com/pro/eikilcxm2-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.