

Epson EB-2142W

EPSON EB-2142W



The EB-2142W LCD projector from Epson has 4200 Ansi lumens, a contrast of 15000:1 and a WXGA 1280 x 800 resolution. The lamp in the projector is specified with a lamp life of 12000 hours, which converts to over 16.4 years at 2 hours per day. The integrated media player allows files to be played directly. Horizontal and vertical keystone correction makes image adjustment childs play. As the EB-2142W is equipped with a microphone jack plug and 16W speakers, no additional audio system is required for presentations or training courses. Thanks to the brightness of 4200 Ansi lumens, a screen width of 658 cm is possible. The projector can also handle slightly brighter rooms with a narrower picture width (we recommend max. 439 cm). A smartphone with MHL connection can be connected directly to the MHL/HDMI port and transmit a 1080p / 60 Hz image mirroring (screen mirroring) while the smartphone is being charged at the same time. The model is also Full HD 1080P compatible. The model was built by Epson in 2018 and is no longer current.



3 x 0,59" DC8 LCD TFT Panel
WXGA 16/10 Liquid Crystal Display

4200 / 2400 im Eco Mode
15000:1 full on/off
0,2800 min. Lumen
1680 Lux (bei 200 cm Screen)
15000:1 full on/off
0,112 min. Lumen

WXGA 1280 x 800
1.024.000 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p

Media player formats: JPEG

Standard-Portabel | External training and company presentations, as well as product presentations.

Wide screen width or rooms with plenty of light (over 200 lumens).

230W Lamp

Articel Nr.: ELPLP96 / V13H010L96

6000 h. 12000 h. in Eco Mode

4,76% / 0,02 €


Manual

Manual 1,66

F=1,51-1,99 f=18,2-29,2 mm

1,35-2,24:1

16W

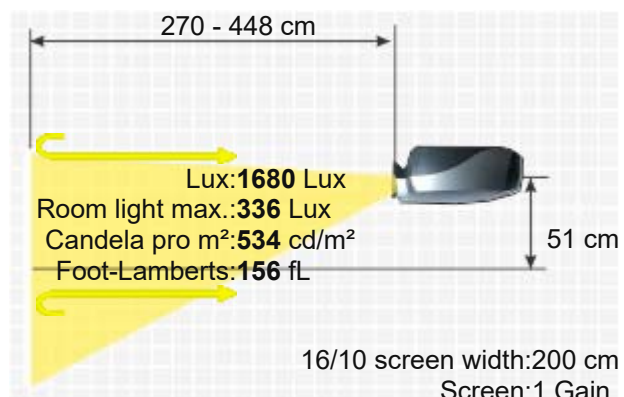

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

2 x HDMI mit MHL in
 2 x D-sub 15pin in 1 x out
 Cinch Video in
 Cinch Stereo in
 Mini Jack Audio in und out
 USB Typ A,B in
 RS232C Din 9 pin in
 RJ45 in
 Mikrofon in

Connections



Ceiling Mounting
 Power
 Size WxHxD
 Operating Noise

Yes
 331 / 227W in Eco Mode
 309 x 90 x 282 mm (12,2"x3,5"x11,1") 7,84 L/dm³
 37 / 28 dB in Eco Mode

Weight
 Keystone
 Illumination
 Frequenz
 Foot-Lamberts

3,10 kg / 6,83 lbs.
 Vert.: +/-30° automatisch
 Hori.: +/-20°
 -
 -
 156 fL / max. 658 cm screen width
 534 cd/m²
 ■ Full HD 1080P compatible
 ■ Integrated Mediaplayer
 ■ Freeze
 ■ Eco Mode
 ■ Automatic and manual vertical keystone correction
 ■ Kensington Slot
 ■ sRGB
 ■ Password protection
 ■ Optional Wi-Fi network compatible.
 ■ Lan network compatible.
 ■ Keystone Automatic Horizontal

Features

Optional

Lamp original ELPLP96 / V13H010L96 / ELPLP97 / V13H010L97
 Air filter original ELPAF54 / V13H134A54
 Remote control original 2181788

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=24631>
 2018 Discontinued (EOL) // Last update of the data: 2023-09-20
 Created: 2018-01-11 12:04:37

Data



More Details



HCinema

<https://www.projector-database.com/pro/epsoneb2142w-en.html>