


Epson EB 450W/i

EPSON EB 450W/i



Top

The Epson EB 450W/i whiteboard LCD projector has 2500 Ansi lumens, a contrast of 2000:1 and a WXGA 1280 x 800 resolution. The projector is equipped with an integrated media player, so direct playback of files will not be a problem. The projector is equipped with a microphone jack plug and 10W speakers, so no additional speakers are required for presentations or training courses. 508 cm image width, the projector will be able to illuminate well. However, if room lighting is available, the picture width should ideally not exceed 339 cm. The projector offers an interactive whiteboard function for interactive training courses and presentations. The model was built by Epson in 2010 and is no longer current, but is still very popular in our projector database.

 3 x LCD TFT Panel
WXGA 16/10 Liquid Crystal Display

Projector	2500 / 1740 im Eco Mode	Screen	1000 Lux (bei 200 cm Screen)
	2000:1 full on/off		2000:1 full on/off
	1,2500 min. Lumen		0,501 min. Lumen

Resolution
WXGA 1280 x 800
1.024.000 Pixel

Video Modes
PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Media player formats: JPEG

Application
Whiteboard | Training and company presentations, as well as product presentations.
Medium screen width or rooms with little light, max. 100 lumens.

Light Source
230W UHE Lamp

Article Nr.: ELPLP57

Light Life
2500 h. 3500 h. in Eco Mode

Operating Costs
-

Focus
Manual

Zoom
No Zoom

Objective
F=1,80 f=4,68mm

Throw Ratio
0,37:1

Audio
1 x 10W

Connections
2 x D-sub 15 pin in 1 x out
S-Video in
Cinch Video in
USB Typ B, A
Mini Jack Audio in und out



Brief Introduction
Beta 2.5

Ceiling Mounting
Power
Size WxHxD
Operating Noise

RJ45 in
RS232C Din 9 pin in
Mikrofon in
Yes
338W / 1W standby
369 x 115 x 481 mm (14,5"x4,5"x18,9") 20,41 L/dm³
35 / 28 dB in Eco Mode

Weight
Keystone
Illumination

5,70 kg / 12,57 lbs.
Vert.: +/-5°
-

Frequenz

-

Foot-Lamberts


93 fL / max. 508 cm screen width
319 cd/m²

- Features
- Direkt Power Off
 - Integrated Mediaplayer
 - Freeze
 - Blackboard Modus
 - Eco Mode
 - Kensington Slot
 - sRGB
 - Password protection
 - PJLink™
 - Control via web browser
 - Optional Wi-Fi network compatible.
 - Lan network compatible.
 - Short-throw projector
 - Digital Zoom
 - Model 'I' with interactive whiteboard.

	Bulb only	NLMP19499
	Lamp ruby	Ruby-LMP19499
	Lamp original	ELPLP57 / V13H010L57
	Compatible lamp	LMP-K19495
Optional	Air filter compatible	Alternative zu:ELPAF27 / V13H134A27
	Remote control original	1519442 / 1515068 / 154165301
	Air filter original	ELPAF27 / V13H134A27 / 152567100
	Ceiling Mount 100-120	Halterung100

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n19496>
2010 Discontinued (EOL) // Last update of the data: 2023-08-04

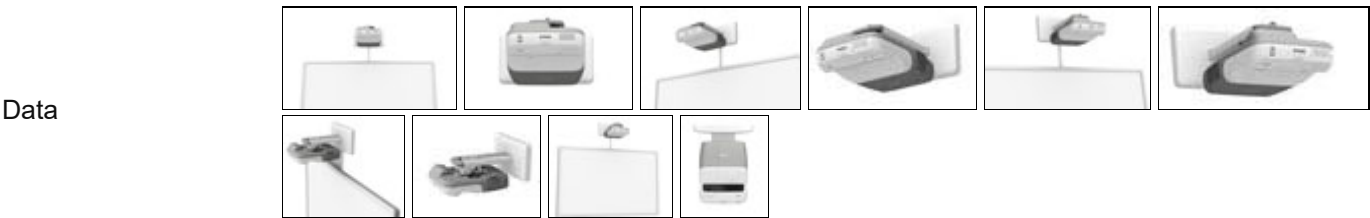

More Details



<https://www.projector-database.com/pro/epsoneb450w-en.html>

