

Nippon Avionics MP-300E



NIPPON AVIONICS MP-300E



Brief presentation
Beta 2.5

Projection system



3 x 1.3"LCD TFT panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

1200 /

400 Lux (with 200 cm canvas)

Contrast

--

--

Black value

--

--

Offset

--

Resolution

XGA 1024 x 768

786.432 pixels

SXGA 1280 x 1024 compressed

Playback signals

NTSC, NTSC 4.43/ PAL/PAL-M / PAL-N , SECAM

Area of application

Stationary | Permanent installation in the training room and meeting room as well as conference room.

Small image width or rooms with very little room light under 100 lumens..

Light source

150W NSH Lamp

Light lifetime

--

Operating costs

--

The focus

Manual

Zoom

Manual

Objective

--

Projection ratio

--

Audio

2 x 1W Stereo

Connections

VGA
S-Video

Ceiling mounting

No

Electricity consumption

260W

Dimensions BxHxT

418 x 242 x 462 mm (16.5"x9.5"x18,2") 46.73 L/dm3

Operating noise

--

Weight

13,80 kg / 30,42 lbs.

Keystone correction

--

illumination


--

frequency

--

Foot-Lamberts

37 fL / max. 302 cm image width

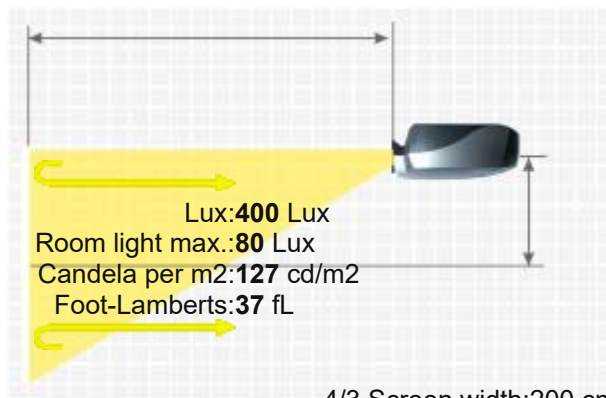

Candela per m2	129.5 cd/m2
Equipment (extras)	■including scanner
Screen Mirroring	- -
Year of construction	- // Last data change: 2023-09-01

More details



HCinema
<https://www.hcinema.de/pro/NipponAvionicsMP-300E.html>

Due to our constant commitment to the continuous improvement of the quality of our projector database, this brochure can be subjected to change even without prior notice. HCinema is not liable for any errors or omissions contained in the product descriptions.