

# Epson EB 570



## Brief Introduction

Beta 2.5

The short-throw EB 570 LCD projector from Epson has 2700 Ansi lumens, a contrast of 10000:1 and an XGA 1024 x 768 resolution. The lamp of the projector is specified with a lamp life of 10000 hours, which is over 13.7 years with a daily viewing time of 2 hours. This projector has a projection ratio of just 0.31:1. For a 2 m wide image, the projector needs to be just 62 cm away from the screen. The model was built by Epson in 2014 and is no longer current.

## Display Type

3 x LCD TFT Panel  
XGA 4/3 Liquid Crystal Display

## Ansi-Lumen

2700 / 1500 im Eco Mode 900 Lux (bei 200 cm Screen)

## Contrast

10000:1 full on/off 10000:1 full on/off

## Black Level

0,2700 min. Lumen 0,09 min. Lumen

## Offset

-

## Resolution

XGA 1024 x 768  
786.432 Pixel

## Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

## Disc Recognition

DVD | HD Blu-ray (komprimiert) | 3D-Blu-ray | 4K-UHD-Blu-ray

## Application

Short Distance | Medium screen width or rooms with little light, max. 100 lumens.

## Light Source

-  
Articel Nr.: ELPLP79 / V13H010L79

## Light Life

5000 h. 10000 h. in Eco Mode

## Operating Costs

-

## Focus

Manual

## Zoom

No Zoom

## Objective

F=1,8 f=3,71mm

## Throw Ratio

0,31:1

## Audio

16W

## Connections

2 x HDMI in  
2 x D-sub 15pin in und out  
USB Typ A,B  
RS232C Din 9 pin in  
Mini Jack Audio in und out  
RJ45 in

## Ceiling Mounting

Yes

## Power

318 /230W in Eco Mode

## Size WxHxD

367 x 155 x 375 mm (14,4"x6,1"x14,8") 21,33 L/dm³

## Operating Noise

35 / 28 dB in Eco Mode

## Weight

5,30 kg / 11,68 lbs.

## Keystone

Vert.: +/-3°

## Illumination



-

## Frequenz

-

## Foot-Lamberts

84 fL / max. 453 cm screen width  
288 cd/m²

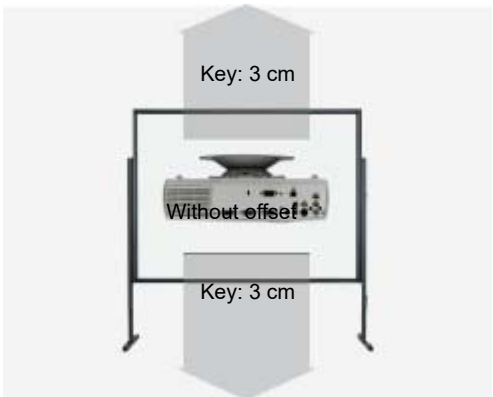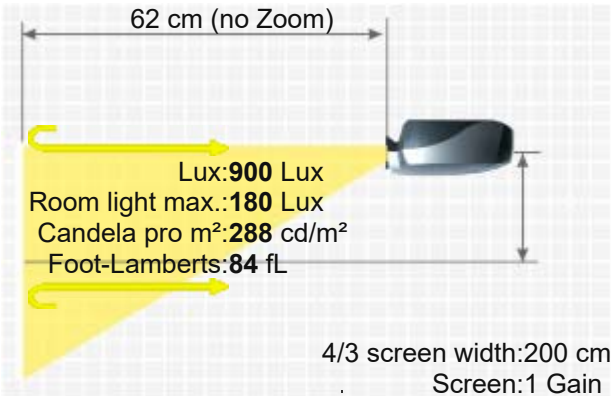

- Eco Mode
- Wi-Fi network compatible.
- Lan network compatible.
- Short-throw projector

Lamp original	ELPLP79 / V13H010L79
Air filter original	ELPAF40 / V13H134A40
Remote control original	1613717

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=22804>  
2014 Discontinued (EOL) // Last update of the data: 2023-08-04  
Created: 2014-01-21 15:03:55



<https://www.projector-database.com/pro/epsoneb570-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.