

Epson EMP 822 /H/SP

EPSON EMP 822 /H/SP



Brief Introduction

Beta 2.5

A brief introduction to the EMP 822 /H/SP: The Epson standard portable LCD projector offers 2600 Ansi lumens, a contrast of 400:1 and an XGA 1024 x 768 resolution. 444 cm image width, the projector will be able to illuminate well. However, if room light is available, the image width should ideally not exceed 296 cm. The model was built by Epson in 2007 and is no longer current, but is still one of the very popular projectors.

Display Type



3 x 0,63" LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen

2600 / 2080 im Eco Mode

867 Lux (bei 200 cm Screen)

Contrast

400:1 full on/off

400:1 full on/off

Black Level

6,5000 min. Lumen

2,184 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

Medium screen width or rooms with little light, max. 100 lumens.

170W UHE Lamp

Light Life

Articel Nr.: V13H010L42

3000 h. 4000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,22

Objective

F=1,60-1,74 f=18,4-22,1 mm

Throw Ratio


1,412-1,697:1

Audio

1 xW Mono

Connections

2 x D-sub 15pin in 1 x out
S-Video in
Cinch Video in
Cinch Stereo in
RJ45 in
RS232C

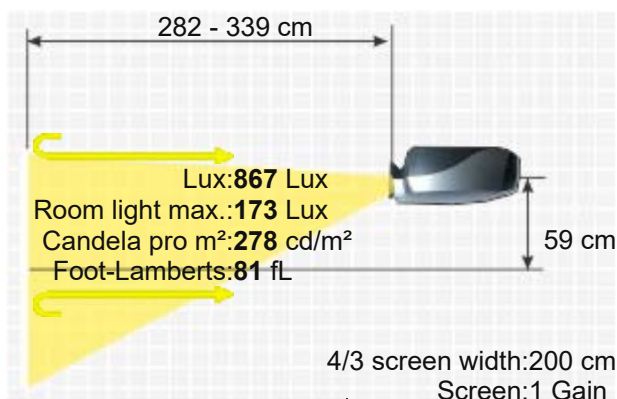



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
231W / 5W standby
327 x 92 x 245 mm (12,9"x3,6"x9,6") 7,37 L/dm³
35 / 28 dB in Eco Mode

Weight
Keystone
Illumination

2,90 kg / 6,39 lbs.
Vert.: +/-30°

Frequenz

H-sync: 15-92 kHz
V-sync: 50-85 Hz
Range max.: 162 MHz

Foot-Lamberts

81 fL / max. 444 cm screen width
278 cd/m²

Features

- Freeze
- Blackboard Modus
- Eco Mode
- Kensington Slot
- sRGB
- Password protection
- PJLink™
- Lan network compatible.
- Digital Zoom
- Quick Start and Instant Off: warm-up and cool-down phase approx. 5 sec.

Optional

- | | |
|---------------------------|---|
| Philips bulb only | NLMP23974 |
| Lamp ruby | Ruby-LMP23974 |
| Lamp original | ELPLP42 / V13H010L42 |
| Compatible lamp | LMP-K16646 |
| Universal Remote original | Fernb-uni-V3 |
| Air filter compatible | Alternative zu:ELPAF13 / V13H134A13 / 1463709 |
| Remote control original | 1456641 |
| 2 air filter original | ELPAF13 / V13H134A13 / 1463709 |
| Ceiling Mount 100-120 | Halterung100 |

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n16646>
2007 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/epsonemp822-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

