

Epson EMP TW2000

EPSON EMP TW2000



A brief introduction to the EMP TW2000: The Epson high-end home cinema LCD projector offers 1600 Ansi lumens, a contrast of 50000:1 and HDTV 1920 x 1080 resolution. The projector also offers a lens shift function that makes image adjustment childs play. 406 cm image width, the projector will be able to illuminate well. However, if room light is available, the image width should ideally not exceed 271 cm. Playing 1080P is also no problem for the projector. The model was built by Epson in 2007 and is no longer current, but is still a popular projector in our database.

Brief Introduction

Display Type

3 x D7 LCD TFT Panel
HDTV 16/9 Liquid Crystal Display

Ansi-Lumen

1600 711 Lux (bei 200 cm Screen)

Contrast

50000:1 full on/off 50000:1 full on/off

Black Level

0,0320 min. Lumen 0,014 min. Lumen

Lens shift

Vert.: +/-96% Hori.: +/-47%

Resolution

HDTV 1920 x 1080
2.073.600 Pixel
SXGA 1280 x 1024 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray | 3D-Blu-ray | 4K-UHD-Blu-ray

Application

High-End Homecinema | Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

170W UHE Lamp
Article Nr.: ELPLP39 / V13H010L39

Light Life

2500 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 2,1

Objective

F=2,0-3,17 f=22,5-47,2 mm

Throw Ratio

1,37-2,88:1

Audio


Nein

Connections

2 x HDMI 1.3
D-sub 15 pin in
YUV in
S-Video in
RS232C

Ceiling Mounting

12V Trigger out
Yes, is possible.

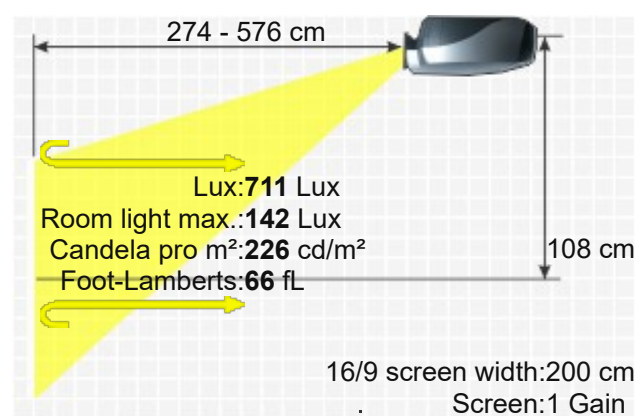

Power -
Size WxHxD 406 x 124 x 310 mm (16"x4,9"x12,2") 15,61 L/dm³
Operating Noise 24 dB in Eco Mode


Weight 5,60 kg / 12,35 lbs.
Keystone -
Illumination -

Frequenz -

Foot-Lamberts 66 fL / max. 406 cm screen width
226 cd/m²

- Features
- Full HD 1080P compatible
 - Lens shift Funktion
 - Blank (Black screen button)
 - Eco Mode
 - Kensington Slot
 - sRGB
 - Gamma correction
 - Dynamic iris
 - Remote control with backlight
 - De-interlacer with 3:2 2:2 pull down

Screen Mirroring -
In Test -

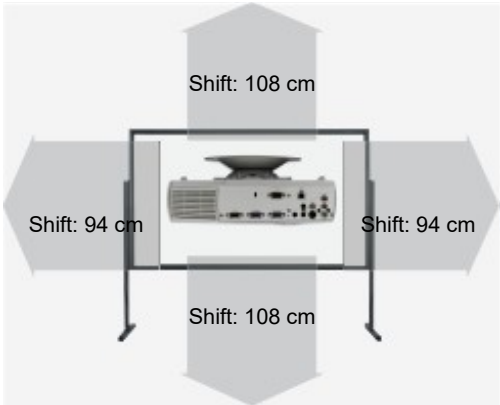

Optional accessories

	Nackte Osram Lampe	NLMP16146	114,87 €
	Lampe Ruby	Ruby-LMP16146	127,72 €
	Lampe Original	ELPLP39 / V13H010L39	EOL €
	Kompatible Lampe	LMP-K16146	71,22 €
	Universal Fernbedienung	Fernb-uni-V3	22,31 €
	Fernbedienung Original	1581984 / 1557492	55,63 €
	Luftfilter Original	ELPAF09 / V13H134A09 / 2122431	EOL €
	Deckenhalterung 100-120	Halterung100	47,86 €

Status 2007 Discontinued (EOL) // Last update of the data: 2025-03-03

Data



More Details



HCinema

<https://www.projector-database.com/pro/epsonemptw2000-en.html>