

YIQ MMD1800



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

Resolution

Video Modes

Application

Light Source
Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting
Power
Size WxHxD
Operating Noise

Weight
Keystone
Illumination

Frequenz

Foot-Lamberts

Features

Status
Data

The standard portable YIQ MMD1800 LCD projector has 2000 Ansi lumens, a contrast of 500:1 and an XGA 1024 x 768 resolution. Due to the brightness of 2000 Ansi lumens, a picture width of 389 cm is possible. In room light, the picture should be max. 259 cm wide. It is no longer offered by the manufacturer YIQ.



3 x 0,7 LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector

2000
500:1 full on/off
4,0000 min. Lumen

Screen

667 Lux (bei 200 cm Screen)
500:1 full on/off
1,342 min. Lumen

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

2000 h.

-

Manual

Manual 1,21

F=1,7-2,1 f=25,6-31 mm

1,8-2,18:1

-

D-sub 15pin in
S-Video
Cinch Video in
RJ45 in

Yes

255W

380 x 93 x 297 mm (15"x3,7"x11,7") 10,5 L/dm³

35dB

4,50 kg / 9,92 lbs.

Vert.: +/-15°



90%

H-sync: 43-85 kHz
V-sync: 15-80 Hz

62 fL / max. 389 cm screen width
212 cd/m²

■ Lan network compatible.

- Discontinued (EOL) // Last update of the data: 2023-08-04

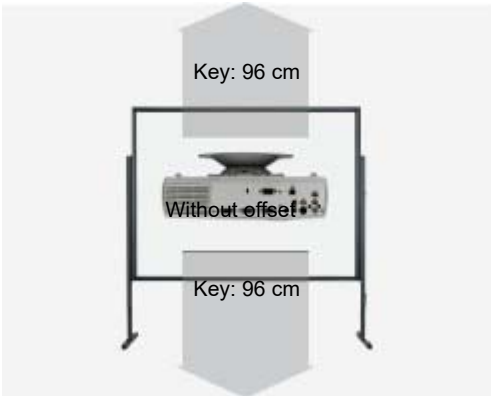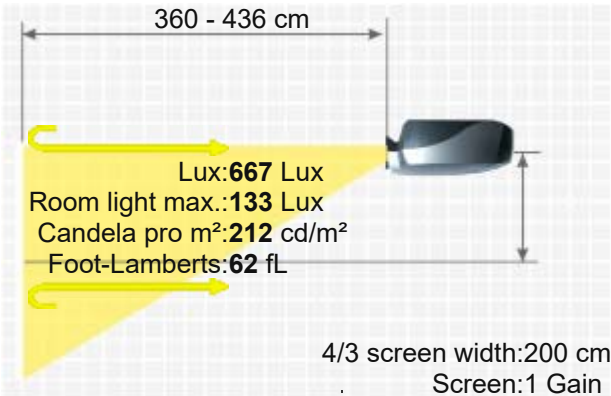



HCinema

<https://www.projector-database.com/pro/YIQmmd1800-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.