

Epson USA PowerLite Pro Z11005NL



The Epson USA PowerLite Pro Z11005NL LCD projector has 11000 Ansi lumens, a contrast of 15000:1 and an XGA 1024 x 768 resolution. Includes a lens shift and keystone correction function, which provides freedom during installation. An image width of up to 913 cm is possible, if the image width is smaller (we recommend max. 609 cm), rooms with residual light are also no problem. In the event that the image is still too small, the projector offers integrated edge blending software, with which several projectors can project a large image together. The model is also Full HD 1080P compatible. The model was built by Epson USA in 2014 and is no longer current.

Brief Introduction

Beta 2.5

Display Type

 3 x LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

11000 / 7100 im Eco Mode

3667 Lux (bei 200 cm Screen)

Contrast

15000:1 full on/off

15000:1 full on/off

Black Level

0,7333 min. Lumen

0,245 min. Lumen

Lens shift

Vert.: +/-56% Hori.: +/-19% motorisch

Resolution

XGA 1024 x 768
786.432 Pixel

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Event | Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

2 x 380W UHE Lamp

Light Life

Article Nr.: ELPLP81 / ELPLP82

1900 h. 3900 h. in Eco Mode

Operating Costs

-

Focus

Powered

Zoom

Powered 1,59

Objective

F=1,65-2,51 f=36-57,35 mm

Throw Ratio

1,74-2,82:1

Audio


Nein

Connections

HDMI in
DVI-D mit HDCP in
5 x BNC RGBHV in
D-sub 15 pin in und out
S-Video in
RJ45 in
HDBaseT in
RS232C

Ceiling Mounting

Yes, is possible.

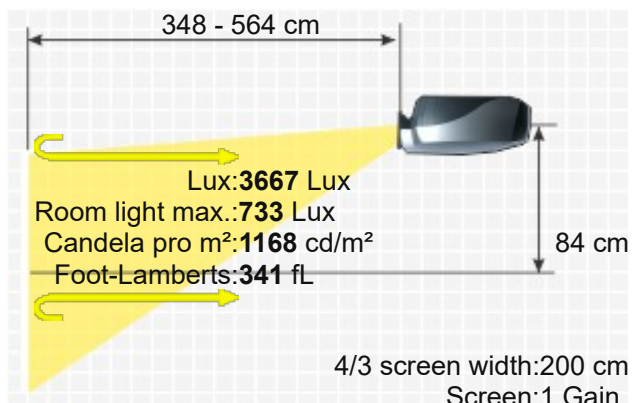


Power 1120 / 821W in Eco Mode
Size WxHxD 534 x 197 x 741 mm (21"x7,8"x29,2") 77,95 L/dm³
Operating Noise 38 / 35 dB in Eco Mode

Weight 24,00 kg / 52,91 lbs.
Keystone Vert.: +/-30°
Hori.: +/-30°
Illumination -
Frequenz H-sync: 15-92 kHz
V-sync: 50-85 Hz
Foot-Lamberts 341 fL / max. 913 cm screen width
1168 cd/m²

- Full HD 1080P compatible
- Lens shift Funktion motorisch
- Eco Mode
- sRGB
- Edge Blending
- Optional Wi-Fi network compatible.
- Lan network compatible.
- Crestron®-Software compatible.
-

Screen Mirroring -

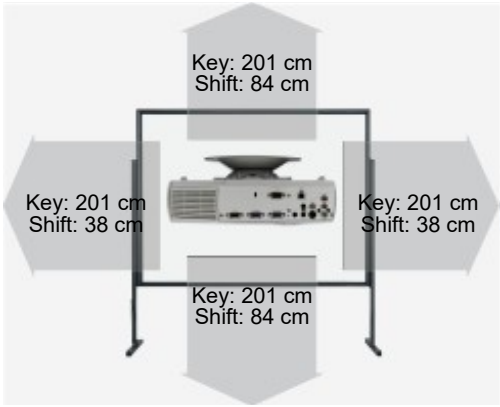

Optional accessories

	Deckenhalterung Länge 225 mm	Halterung45	85,80 €
	Luftfilter universal	uni3mm	18,15 €

Optional Lenses

Status 2014 Discontinued (EOL) // Last update of the data: 2025-03-03
Data Created: 2014-08-18 14:32:48

More Details



HCinema

<https://www.projector-database.com/pro/epsonpowerliteproz11005nl-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice.
HCinema is not responsible for any errors or omissions contained in product descriptions.

005NL