acer
explore beyond limits™

# Quick Start Guide

1

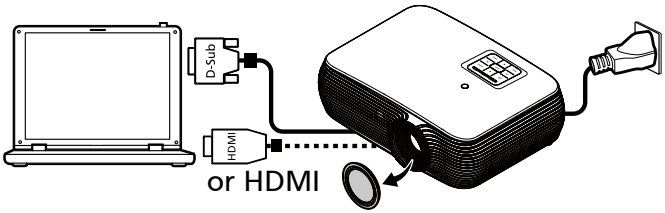


2

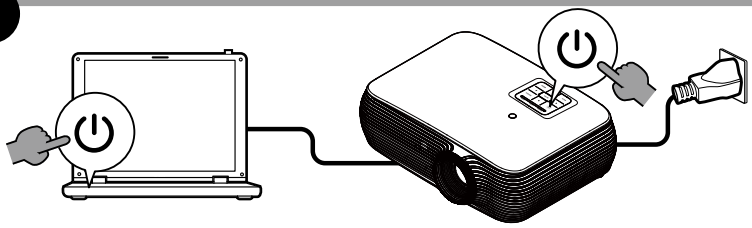

3

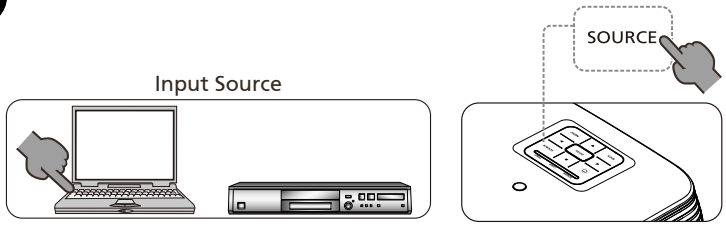


4

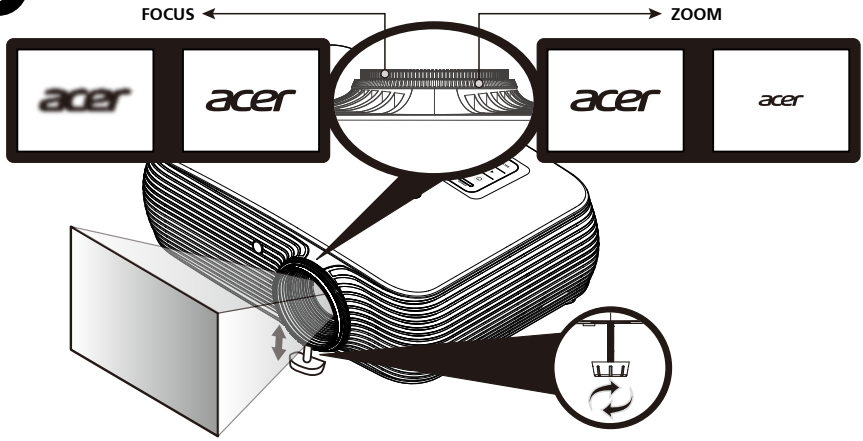

# INSTALLATION

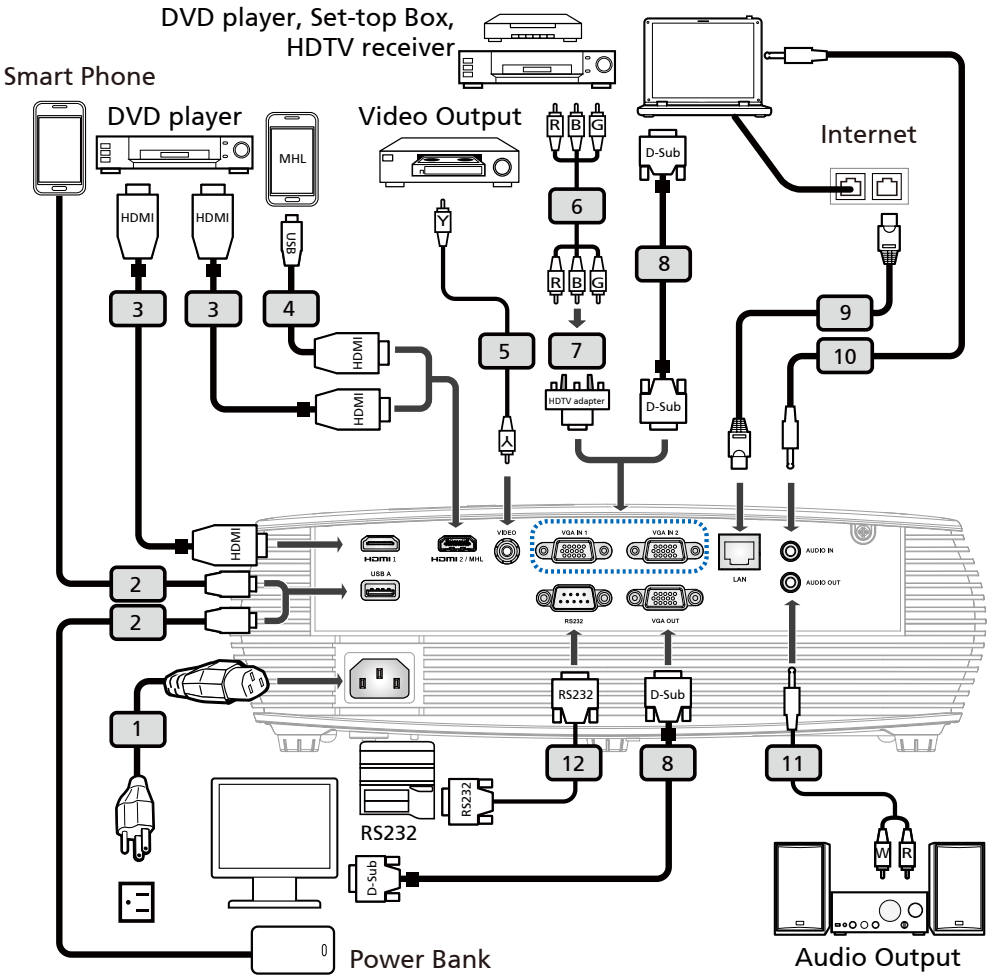


Note: Functions vary depending on model definition.

Scan to get user's manual

HIGH-DEFINITION MULTIMEDIA INTERFACE

UA.TR.060

Recyclable Paper

WPP

36.7AH02H001-A

P/N:MC.JPH11.003

# SPECIFICATIONS

| | |
|---|---|
| Projection system | DLP® |
| Resolution | • P5230/N318/PN-X17/PR242/MF-142/DNX1706 series: 1024x768 XGA resolution<br>• P5330W/N328/PN-W17/PR442/MF-342/DWX1705 series: 1280x800 WXGA resolution<br>• P5530/N358/PN-817/PR542/MF-442/D1P1704 series: 1920x1080 1080p resolution<br>• P5630/N368/PN-WU17/PR642/MF-542/DWU1703 series: 1920x1200 WUXGA resolution resolution |
| Computer compatibility | IBM PC and compatibles, Apple Macintosh, iMac and VESA standards: SXGA, XGA, VGA, SVGA, SXGA+, WXGA, WXGA+, WSXGA+ |
| Video compatibility | NTSC (3.58/4.43), PAL (B/D/G/H/I/M/N), SECAM (B/D/G/K/K1/L), HDTV (720p, 1080i, 1080p), EDTV (480p, 576p), SDTV (480i, 576i) |
| Aspect ratio | Auto, Full, 4:3, 16:9, L.Box |
| Displayable colors | 1.07 billion colors |
| Optical zoom ratio | 1.3X |
| Throw ratio | • P5230/N318/PN-X17/PR242/MF-142/DNX1706 series: 1.49 ~ 1.93 (66”@2m)<br>• P5330W/N328/PN-W17/PR442/MF-342/DWX1705 series: 1.19 ~ 1.54 (78”@2m)<br>• P5530/N358/PN-817/PR542/MF-442/D1P1704 series: 1.13 ~ 1.47 (80”@2m)<br>• P5630/N368/PN-WU17/PR642/MF-542/DWU1703 series: 1.13 ~ 1.47 (82”@2m) |
| Projection lens | F = 2.50 ~ 2.78, f = 16.91mm ~ 21.60mm, Manual Zoom & Focus |
| Projection screen size (diagonal) | • P5230/N318/PN-X17/PR242/MF-142/DNX1706 series: 25” ~ 300” (65cm ~ 762cm)<br>• P5330W/N328/PN-W17/PR442/MF-342/DWX1705 series: 30” ~ 300” (76cm ~ 762cm)<br>• P5530/N358/PN-817/PR542/MF-442/D1P1704 series: 31” ~ 300” (78cm ~ 762cm)<br>• P5630/N368/PN-WU17/PR642/MF-542/DWU1703 series: 32” ~ 300” (80cm ~ 762cm) |
| Projection distance | • P5230/N318/PN-X17/PR242/MF-142/DNX1706 series: 1.0m ~ 9.1m (3.3’ ~ 29.7’)<br>• P5330W/N328/PN-W17/PR442/MF-342/DWX1705 series: 1.0m ~ 7.7m (3.3’ ~ 25.2’)<br>• P5530/N358/PN-817/PR542/MF-442/D1P1704 series: 1.0m ~ 7.5m (3.3’ ~ 24.6’)<br>• P5630/N368/PN-WU17/PR642/MF-542/DWU1703 series: 1.0m ~ 7.3m (3.3’ ~ 24.0’) |
| Horizontal scan rate | 15 - 100 kHz |
| Vertical refresh scan rate | 24 - 120 Hz |
| Lamp type | 240W user-replaceable lamp |
| Keystone correction | ±20 degrees |
| Audio | Internal speaker with 16W x 1 output |
| Weight | 2.65 Kg (5.8 lbs) |
| Dimensions (W x D x H) | 315 mm X 214 mm X 98 mm (12.4” x 8.4” x 3.8”) |
| Digital Zoom | 2x |
| Power supply | AC input 100 - 240 V auto-switching power supply |

| | |
|---|---|
| Power consumption | Normal mode: 290W ± 10% @ 110VAC<br>ECO mode: 205W ± 10% @ 110VAC<br>Standby mode < 0.5W<br>Network standby mode: <3W |
| Operating temperature | 0°C to 40°C / 32°F to 104°F |
| Standard package contents | • AC power cord x1<br>• Remote control x1<br>• Security card x1<br>• AAA battery x2 (for remote control) (option)<br>• User's guide (Projector)(CD-ROM) x1<br>• Quick start guide (Projector) x1<br>• User's guide (Media/Wireless function) (CD-ROM) x1<br>• Quick start guide (Media/Wireless function) x1<br>• VGA cable x1 (option)<br>• HDMI cable x1 (option)<br>• Carrying case x1 (option) |
| I/O connectors | • Power socket x1<br>• VGA IN x2<br>• HDMI x1<br>• HDMI2/MHL x1<br>• RJ45 LAN input x1<br>• VGA output x1<br>• RS232 x1<br>• 3.5 mm audio jack input x1<br>• 3.5 mm audio jack output x1<br>• Composite video x1 |

**Note:**

- **The specifications listed above are subject to change without notice.**
- **Find manuals and other documents for your Acer product on the official Acer support website**.

Consumo de Energia

| |
|---|
| En Operaction: 307.05 Wh (307,05 Wh) |
| En modo de espera: 0.41 Wh (0,41 Wh) |