

Epson USA PowerLite X12



Brief Introduction

Beta 2.5

The Epson USA PowerLite X12 standard portable LCD projector has 2800 Ansi lumens, a contrast of 3000:1 and an XGA 1024 x 768 resolution. The lamp in the projector is specified with a lamp life of 4000 hours, which is over 5.5 years with a daily viewing time of 2 hours. The integrated media player allows files to be played directly. The horizontal and vertical keystone correction provides leeway when setting up. A picture width of 461 cm is possible thanks to the brightness of 2800 Ansi lumens. In room light, the picture should be max. 307 cm wide. Even 1080P video signals are no problem for the projector. The model was built by Epson USA in 2011 and is no longer current.

Display Type

3 x LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

2800 933 Lux (bei 200 cm Screen)

Contrast

3000:1 full on/off 3000:1 full on/off

Black Level

Offset 0,9333 min. Lumen 0,311 min. Lumen

Resolution

XGA 1024 x 768
786.432 Pixel
UXGA 1600 x 1200 compressed
PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Video Modes

Media player formats: jpeg, bmp, gif, png
Standard-Portabel | External training and company presentations, as well as product presentations.

Application

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

200W UHE Lamp
Articel Nr.: ELPLP67 / V13H010L67

Light Life

4000 h. 5000 h. in Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

F=1,58-1,72 f=16,9-20,28 mm

Throw Ratio

1,48-1,77:1

Audio

1 x 2W Mono

Connections

HDMI in
D-sub 15 pin in
S-Video in
Cinch Video in
Cinch Stereo in
USB Typ A,B in



Ceiling Mounting

Yes

Power


283 / 220W in Eco Mode

Size WxHxD


295 x 77 x 228 mm (11,6"x3"x9") 5,18 L/dm³

Operating Noise

37 / 29 dB in Eco Mode

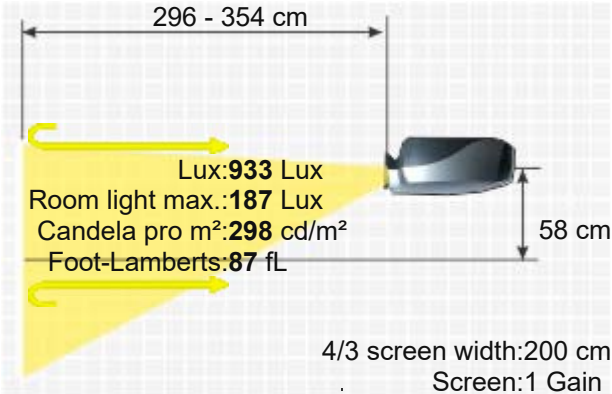

Weight 2,30 kg / 5,07 lbs.
Keystone Vert.: +/-30° automatisch
Illumination Hori.: +/-30°
-
Frequenz -
Foot-Lamberts 87 fL / max. 461 cm screen width
298 cd/m²

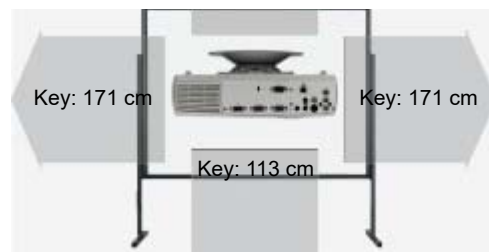

■ Full HD 1080P compatible
■ Integrated Mediaplayer
■ Freeze
■ Blackboard Modus
■ Eco Mode
Features ■ Automatic and manual vertical keystone correction
■ Kensington Slot
■ sRGB
■ Password protection
■ Remote control with mouse control
■ Overscan adjustable

Status Data 2011 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/epsonpowerlitex12-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.