

Everest STX 1025 /SP

EVEREST STX 1025 /SP



Brief Introduction

Beta 2.5

A brief introduction to the Everest STX 1025 /SP. The whiteboard LCD projector has an XGA 1024 x 768 resolution and a contrast of 500:1. An image width of up to 435 cm is possible. However, the image should be smaller in room light. We recommend max. 290 cm. The projector is equipped with an integrated whiteboard function for interactive training and presentations. The model was built by Everest in 2013 and is no longer current, but is still very popular in our projector database.



3 x 0,63" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

2500
500:1 full on/off
5,0000 min. Lumen

833 Lux (bei 200 cm Screen)
500:1 full on/off
1,676 min. Lumen

Resolution

XGA 1024 x 768
786.432 Pixel
UXGA 1600 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Application

Whiteboard | Training and company presentations, as well as product presentations.
Medium screen width or rooms with little light, max. 100 lumens.

Light Source
Light Life

210W Lamp
-

Operating Costs

-

Focus

Manual

Zoom

No Zoom

Objective

-

Throw Ratio

0,63:1

Audio

1 x 8W

Connections

HDMI in
D-sub 15 pin in und out
YUV in
S-Video in
Cinch Video in
Mini Jack Audio in und out
USB Maus in
RS232C

Ceiling Mounting
Power

Yes
295W

Size WxHxD

348 x 132 x 360 mm (13,7"x5,2"x14,2") 16,54 L/dm³

Operating Noise

33,5 dB in Eco Mode

Weight


4,10 kg / 9,04 lbs.

Keystone

-

Illumination

-

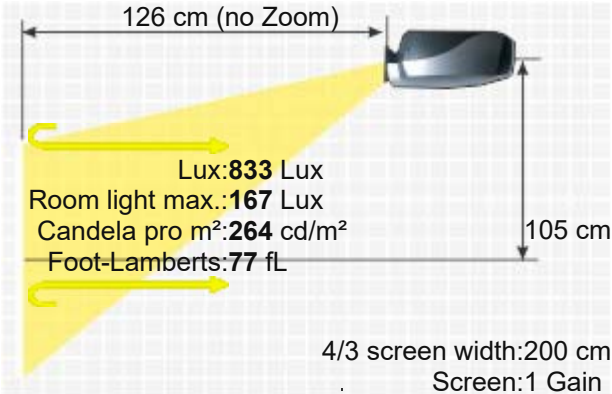

Frequenz	H-sync: 31-92 kHz V-sync: 48-120 Hz
Foot-Lamberts	77 fL / max. 435 cm screen width 264 cd/m²
Features	■ Eco Mode ■ Remote control with mouse control ■ Short-throw projector ■ SP with whiteboard function.
Status Data	2013 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/evereststx1025-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.