ACTO DS115



Brief Introduction Beta 2.5	The standard portable DS115 3D DLP has 2700 Ansi lumens, a contrast of 2600:1 and an SVGA 800 x 600 resolution. The projector will be able to illuminate a 453 cm image width well. However, if room light is available, the image width should ideally not exceed 302 cm. The operating noise of only 30 decibels makes the projection quiet. The projector is no longer sold by the manufacturer.
Display Type	1 x 0,55" DLP Chip SVGA 4/3 Ti Digital Light Processing Chip
Projector: Ansi-Lumen	2700
Projector: Contrast	2600:1 full on/off
Projector: Black Level	1,0385 min. Lumen
Projector: Offset	-
Screen	900 Lux (bei 200 cm Screen) 2600:1 full on/off 0,347 min. Lumen
Resolution	SVGA 800 x 600 480.000 Pixel SXGA 1280 x 1024 compressed
Video Modes	PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
3D Compatibility	Frame Sequential (3D Ready)
Application	Standard-Portabel | External training and company presentations, as well as product presentations. Medium screen width or rooms with little light, max. 100 lumens.
Light Source	230W SHP Lamp
Light Life	3000 h. 4000 h. in Eco Mode
Operating Costs	-
Focus	Manual
Zoom	Manual 1,1
Objective	-
Throw Ratio	1,94-2,13:1
Audio	-
Connections	D-sub 15 pin in und out S-Video in Cinch Video in RS232C USB Typ B
Ceiling Mounting	Yes
Power	250W
Size WxHxD	264 x 78 x 208 mm (10,4"x3,1"x8,2") 4,28 L/dm³
Operating Noise	30dB
Weight	2,20 kg / 4,85 lbs.
Keystone	Vert.: +/-30°
Illumination	85%
Frequenz	H-sync: 15-110 kHz V-sync: 50-80 Hz
Foot-Lamberts	84 fL / max. 453 cm screen width

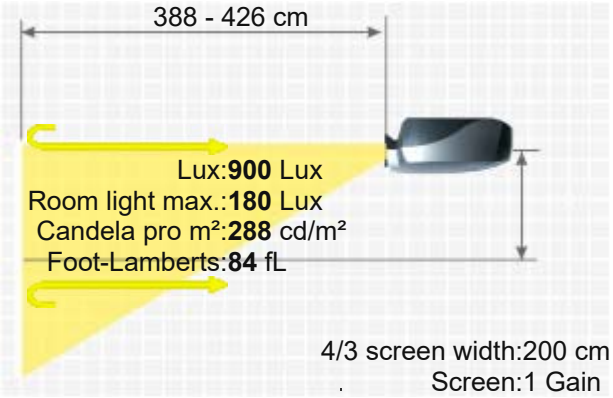



ACTO DS115



288 cd/m²

Features
- Eco Mode
- 6-segment colour wheel.

Status Data
- Discontinued (EOL) // Last update of the data: 2023-08-04

More Details

https://www.projector-database.com/pro/actods115-en.html

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.