

Hitachi CP X3010EN

HITACHI CP X3010EN



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

A brief introduction to the CP X3010EN: The Hitachi LCD projector offers 3200 Ansi-Lumen, a contrast of 2000:1 and an XGA 1024 x 768 resolution. 493 cm image width, the projector will be able to illuminate well. However, if room light is available, the image width should ideally not exceed 329 cm. It is also Full HD 1080P compatible. The model was built by Hitachi in 2010 and is no longer current.



3 x 0,63" LCD TFT Panel
XGA 4/3 Liquid Crystal Display


Projector

3200 / 2100 im Eco Mode
2000:1 full on/off
1,6000 min. Lumen

Screen

1067 Lux (bei 200 cm Screen)
2000:1 full on/off
0,534 min. Lumen

XGA 1024 x 768
786.432 Pixel
UXGA 1600 x 1200 compressed
PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p
Standard-Portabel | External training and company presentations, as well as product presentations.
Medium screen width or rooms with a little more ambient light, max. 200 lumens.
210W UHP Lamp
Articel Nr.: CPX2010LAMP DT01021
3000 h. 6000 h. in Eco Mode

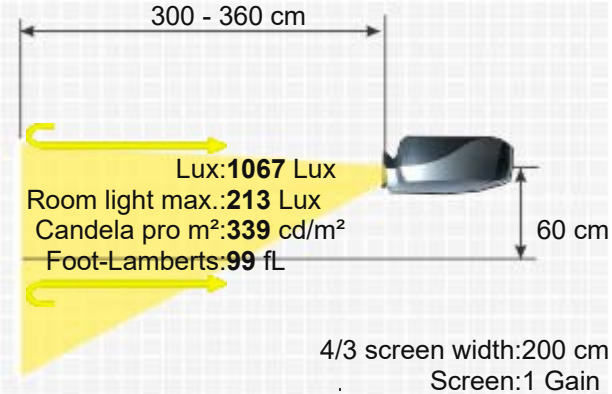



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
330W
317 x 118 x 288 mm (12,5"x4,6"x11,3") 10,77 L/dm³
36 / 29 dB in Eco Mode

Weight
Keystone
Illumination

3,60 kg / 7,94 lbs.
Vert.: +/-30° automatisch
-

Frequenz

H-sync: 15-106 kHz
V-sync: 50-120 Hz

Foot-Lamberts

99 fL / max. 493 cm screen width
339 cd/m²

- Full HD 1080P compatible
- Freeze
- Blackboard Modus
- User logo
- Eco Mode
- Automatic and manual vertical keystone correction
- Kensington Slot
- Gamma correction
- Password protection
- Remote control with mouse control
- PJLink™
- Control via web browser
- Lan network compatible.
- Overscan adjustable

Features

- | | |
|--------------------------------|---------------|
| Osram bulb only | NLMP18952 |
| Lamp ruby | Ruby-LMP18952 |
| Lamp incl. air filter original | DT01021 |
| Compatible lamp | LMP-K18938 |
| Universal Remote original | Fernb-uni-V3 |
| Ceiling Mount 100-120 | Halterung100 |

Optional

Status

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=ne2115>
2010 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/hitachicpx3010en-en.html>