

Hewlett Packard vp6321/0,b,c

HEWLETT PACKARD VP6321/0,B,C



Brief Introduction

Beta 2.5

The vp6321/0,b,c DLP has 2000 Ansi lumens, a contrast of 2500:1 and an XGA 1024 x 768 resolution. The manufacturer, Hewlett Packard, specifies a lamp life of 4000 hours, which converts to over 5.5 years at 2 hours per day. A picture width of up to 389 cm is possible. However, the picture should be smaller in room light. We recommend max. 259 cm. Video signals 1080P are also no problem for the projector. The model was built by Hewlett Packard in 2005 and is no longer current.

Display Type

1 x 0,7" 12 Grad DDR DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen
Contrast
Black Level
Offset

Projector 2000
2500:1 full on/off
0,8000 min. Lumen
Screen 667 Lux (200 cm Screen width)
2500:1 full on/off
0,267 min. Lumen

Resolution

XGA 1024 x 768
786.432 Pixel

Video Modes

SXGA 1280 x 1024 compressed
PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p
Standard-Portabel | External training and company presentations, as well as product

Application

presentations.
Medium screen width or rooms with little light, max. 100 lumens.

Light Source

210 / 168W im Eco Mode Lamp

Light Life

Article Nr.: L1695A

4000 h. 8000 h. in Eco Mode

Operating Costs

12,5% / 0,05 €

Focus

Manual

Zoom

Manual 1,2

Objective

F=2,4-2,6 f=24,3-29,2 mm

Throw Ratio


1,8-2,1:1

Audio

1 x 6W

Connections

DVI mit HDCP
D-sub 15pin in und out
Cinch Video in
Cinch Stereo in
S-Video in
Mini Jack
USB Typ B

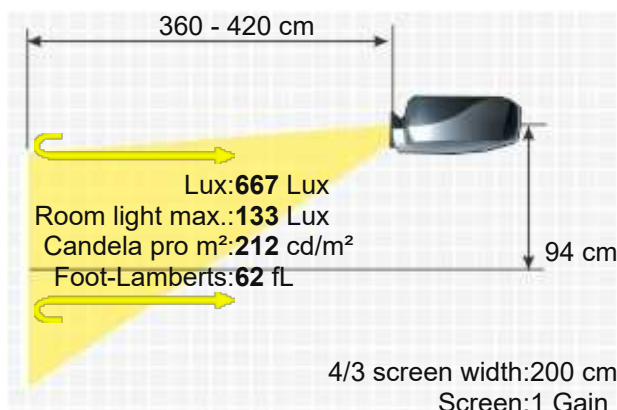

RS232C
12V Trigger



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
285W
280 x 102 x 255 mm (11"x4"x10") 7,28 L/dm³
36 / 34 dB in Eco Mode

Weight
Keystone
Illumination

3,50 kg / 6,61 lbs.
Vert.: +/-20°
-

Frequenz

H-sync: 15-100 kHz
V-sync: 43-85 Hz

Foot-Lamberts

62 fL / max. 389 cm screen width
212 cd/m²

- Full HD 1080P compatible
- Eco Mode
- Kensington Slot
- Picture-in-Picture

Features


- Password protection
- Remote control with laser pointer und mouse control
- vp6310 (L1687A) ist das USA Modell mit 1 Jahr Garantie
- vp6320b (L2317A) ist das USA Modell mit 2 Jahre Garantie
- vp6320c (L2318A) ist das USA Modell mit 3 Jahre Garantie

Screen Mirroring

-

Please note

vp6310 (L1687A) is the USA model with 1 year warranty
vp6320b (L2317A) is the USA model with 2 years warranty
vp6320c (L2318A) is the USA model with 3 years warranty

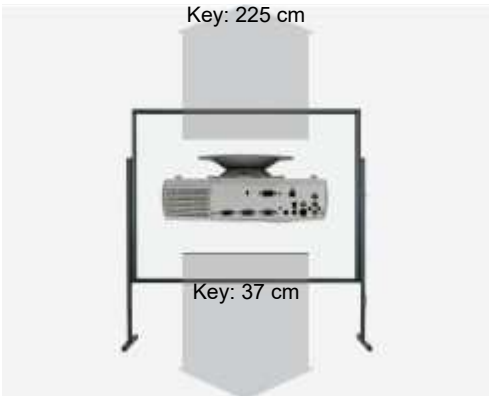

Optional accessories

	Lampe Ruby	Ruby-LMP1719	207,48 €
	Lampe Original	L1695A	EOL €
	Kompatible Lampe	LMP-K15431	103,93 €
	Deckenhalterung 100-120	Halterung100	47,86 €

Status 2005 Discontinued (EOL) // Last update of the data: 2026-06-09

Data



More Details



HCinema

<https://www.projector-database.com/pro/hpvp6321-en.html>