

Infoto PCL-LT9000X



INFO TO PCL-LT9000X



Brief Introduction

Beta 2.5

A brief introduction to the Infoto PCL-LT9000X. The LCD projector has an XGA 1024 x 768 resolution and a contrast of 5000:1. The lamp life is up to 4000 hours, which is over 5.5 years with a daily viewing time of 2 hours. The projector also offers an integrated media player with which files can be played directly. Includes a lens shift and keystone correction function, which provides freedom during installation. The projector can illuminate images up to 808 cm wide thanks to its 8600 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 539 cm. Furthermore, the projector can play 1080P without any problems. The model was built by Infoto in 2017 and is no longer current.

 3 x 0,79" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

8600

5000:1 full on/off

1,7200 min. Lumen

Vert.: +/-60% Hori.: +/-30%

XGA 1024 x 768

786.432 Pixel

WUXGA 1920 x 1200 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Media player formats: jpg/jpeg bmp png gif tiff avi

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

350W Lamp

4000 h. 6000 h. in Eco Mode

-

Powered

Powered 1,8

F=1,8-2,6 f=24,0-43,2 mm

1,47-2,65:1

10W Mono

HDMI in

D-sub 15pin in und out

5 x BNC RGBHV in

Cinch Video in

Cinch Stereo in

S-Video in

Mini Jack Audio in und out

RS232C Din 9 pin in

RJ45 in

Yes

580W/370W in Eco Mode

480 x 180 x 420 mm (18,9"x7,1"x16,5") 36,29 L/dm³


36 / 32 dB in Eco Mode

9,90 kg / 19,84 lbs.


2867 Lux (bei 200 cm Screen)

5000:1 full on/off

0,574 min. Lumen

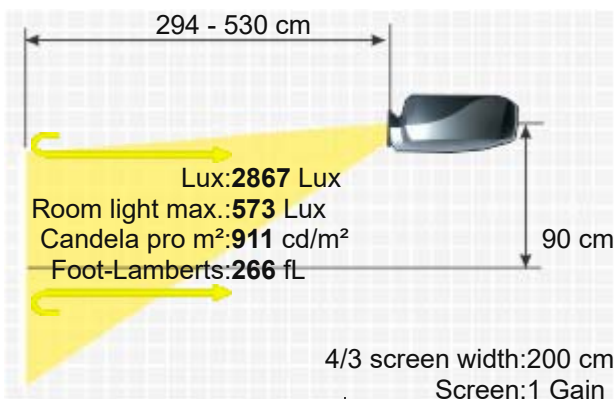

Keystone	Vert.: +/-30°
Illumination	Hori.: +/-15° 90%
Frequenz	-
Foot-Lamberts	266 fL / max. 808 cm screen width 911 cd/m²
Features	■ Full HD 1080P compatible
	■ Lens shift Funktion
	■ Integrated Mediaplayer
	■ Eco Mode
	■ Kensington Slot
	■ PJLink™
	■ Optional Wi-Fi network compatible.
	■ Lan network compatible.
	■ Crestron®-Software compatible.

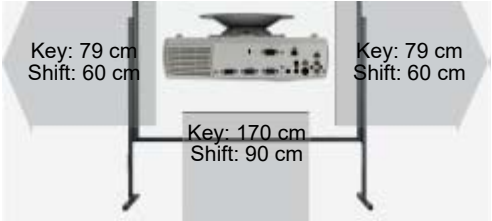

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
OL-XL7100TZ	4.3-7.4:1	8.6-14.8 m	+/-60%	+/-30%	Powered
OL-XL7100SZ	1.2-1.5:1	2.4-3 m	+/-60%	+/-30%	Powered
OL-XL7100LZ	2.6-4.4:1	5.2-8.8 m	+/-60%	+/-30%	Powered
Fix Optional Lenses					
OL-XL7100FR	0.8:1	1.6 m	0.00% Fix		No Zoom

Status Data 2017 Discontinued (EOL) // Last update of the data: 2023-08-30

More Details



HCinema

<https://www.projector-database.com/pro/infoPCLLT9000X-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.