

JVC DLA X700R/BE

JVC DLA X700R/BE



A brief introduction to the DLA X700R/BE: The JVC high-end home cinema 3D DILA projector offers 1200 Ansi lumens, a contrast of 120000:1 and a UHD (4K2K) 3840 x 2160 resolution. The manufacturer specifies a lamp life of 4000 hours, which is over 5.5 years if enjoyed for two hours every day. The projector also offers a lens shift function that makes image adjustment child's play. An image width of up to 352 cm is possible. However, the image should be smaller in room light. We recommend max. 235 cm. The model is also compatible with Full HD 1080P and 4K as well as 3D, meaning that all Blu-ray formats currently available can be recognized by the projector. The projector is very quiet compared to other projectors with an operating noise of 20 decibels. The model was built by JVC in 2013 and is no longer current, but is still a popular projector in our database.

Brief Introduction

Display Type

3 x 0,7" DILA Chip
HDTV 16/9 Direct-Drive Image Light Amplification (D-ILA)

Ansi-Lumen

1200 533 Lux (bei 200 cm Screen)

Contrast

120000:1 full on/off 120000:1 full on/off

Black Level

0,0100 min. Lumen 0,004 min. Lumen

Lens shift

Vert.: +/-80% Hori.: +/-34%

Resolution

UHD (4K2K) 3840 x 2160
8.294.400 Pixel / FHD E-Shift
UHD (4K2K) 3840 x 2160 compressed
Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), 3D, EDTV 480p, 576p

Video Modes

Disc Recognition

DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray (30p, 60p)

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready) | 2D-zu-3D Video Converter

Application

High-End Homecinema | Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

NSH 230W Lamp
Article Nr.: PK-L2210U

Light Life

4000 h.

Operating Costs

13,89% / 0,1 €

Focus

Powered

Zoom


Powered 2

Objective

F=3,2-4,0 f=21,4-42,80 mm

Throw Ratio

1,4-2,8:1

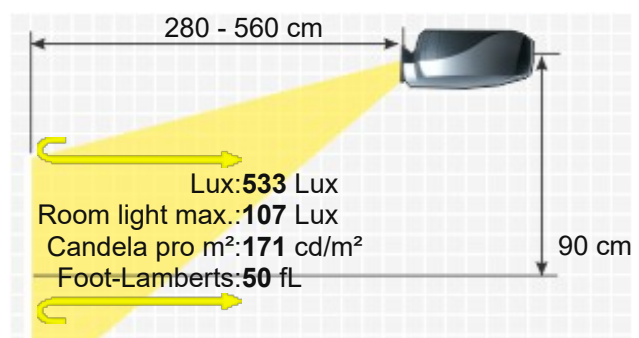

Audio	Nein	16/9 screen width:200 cm Screen:1 Gain
Connections	2 x HDMI 1.4a D-sub 15 pin in YUV in RS232C RJ45 in 12V Trigger out	
Ceiling Mounting	Yes, is possible.	
Power	360W	
Size WxHxD	455 x 179 x 472 mm (17,9"x7"x18,6")	38,44 L/dm ³
Operating Noise	20dB	

Weight	15,40 kg / 33,95 lbs.
Keystone	-
Illumination	-

Frequenz


Foot-Lamberts	50 fL / max. 352 cm screen width 171 cd/m ²
---------------	---

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- sRGB
- Gamma correction
- Remote control with backlight
- Lan network compatible.

Screen Mirroring

-

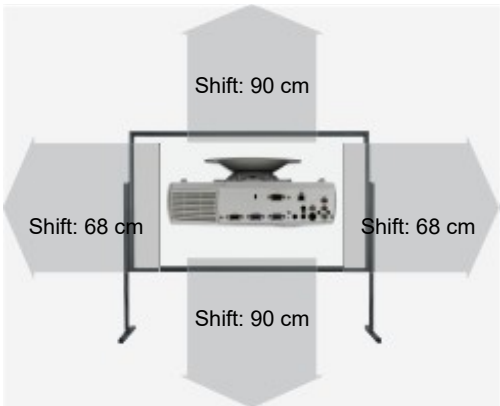

Optional accessories

	Nackte Philips Lampe	NLMP23601	124,05 €
	Lampe Ruby	Ruby-LMP23601	113,41 €
	Lampe Original	PK-L2312U / PK-L2312UG	417,31 €
	Kompatible Lampe	LMP-K21552	50,94 €
	Deckenhalterung 220	Halterung45	83,60 €

Status 2013 Discontinued (EOL) // Last update of the data: 2025-03-03
Created: 2013-09-11 14:31:44

Data



More Details



HCinema

<https://www.projector-database.com/pro/jvcdlax700-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.