

LG RD JT91

LG RD JT91



Brief Introduction

Beta 2.5

The standard portable RD JT91 DLP projector from LG has 1700 Ansi lumens, a contrast of 2000:1 and an SVGA 800 x 600 resolution. An image width of up to 359 cm is possible as the projector has 1700 Ansi lumens. However, if room light is available, the picture should be max. 239 cm wide. The model was built by LG in 2004 and is no longer current.

Display Type



1 x 0,55" 12 Grad DLP Chip
SVGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

1700 / 1300 im Eco Mode

550 Lux (bei 203 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

0,8500 min. Lumen

0.275 min. Lumen

Offset

Resolution

SVGA 800 x 600

480.000 Pixel

Video Modes

SXGA 1280x1024 compressed

Pal, Secam, NTSC, EDTV, HDTV

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

200W NSH Lamp

Articel Nr.: 6912B22008A

Light Life

2000 h. in 3000 h. Eco Mode

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

f=19,6-23,5 mm

Throw Ratio

1,72-2,07:1

Audio

1W Mono

Connections

D-sub 15pin in

DVI-D in

S-Video in

Cinch Video in

Ceiling Mounting


Power

USB in

RS232C in

Yes

260W

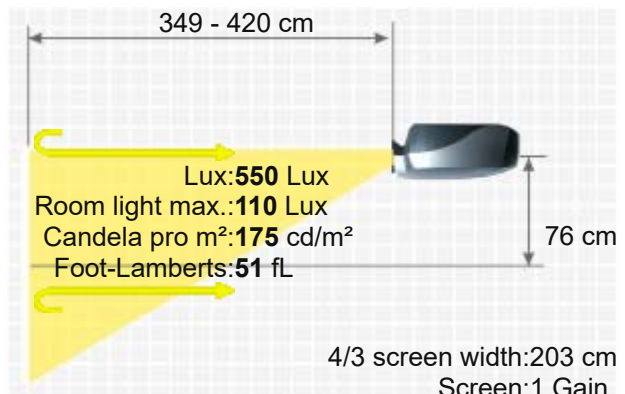

Size WxHxD	289 x 89 x 210 mm (11,4"x3,5"x8,3") 5,4 L/dm³	
Operating Noise	32 / 26 dB in Eco Mode	
Weight	3,10 kg / 6,83 lbs.	
Keystone	Vertical	
Illumination	80%	
Frequenz	H-sync: 31,5-64 kHz V-sync: 50-85 Hz	
Foot-Lamberts	51 fL / max. 359 cm screen width 175 cd/m²	
Features	■ Freeze	
	■ Blank (Black screen button)	
	■ User logo	
	■ Eco Mode	
	■ Kensington Slot	
	■ Gamma correction	
	■ Magnesium casing	
	■ Digital zoom	
Optional	Lamp ruby	Ruby-LMP4780
	Bulb only original	6912B22008A / AJ-LT91
	Compatible lamp	LMP-K16826
Status	Order here: https://www.hcinema.de/lampen/shop-en.php?id=d4516 2004 Discontinued (EOL) // Last update of the data: 2023-08-04	



HCinema

<https://www.projector-database.com/pro/lgrdjt91-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.