

Liesegang Chelsea

LIESEGGANG CHELSEA



A brief introduction to the Chelsea: The Liesegang standard portable DLP projector offers 2000 Ansi lumens, a contrast of 1000:1 and an XGA 1024 x 768 resolution. A built-in horizontal and vertical keystone correction provides freedom when positioning the projector. 2000 Ansi lumens ensure that a picture width of 389 cm is also possible. However, if room light is available, the image should be a maximum of 259 cm wide. The model was built by Liesegang in 2003 and is no longer current. It should also be noted that there are unfortunately no more replacement lamps for the projector, neither originals nor replicas.

 1 x 0,7" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Projector	2000	647 Lux (bei 203 cm Screen)
	1000:1 full on/off	1000:1 full on/off
	2,0000 min. Lumen	0.649 min. Lumen

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC, HDTV

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

200W VIP Lamp

Articel Nr.: ZU0207 04 4010

2000 h.

-

Manual


Manual 1,24

F=2,4-2,8 f=23-28,5 mm

1,62-2:1

2 x 1W

Computer in 1 x RGB analog (D-Sub HD)
1 x DVI-I
Maus 1 x USB
Steuerung 1 x RS232C (PS/2)
Monitor out 1 x RGB (D-Sub HD)
Video in 1 x Video (Cinch)
1 x S-Video (Mini-DIN)
1 x Component (Cinch)

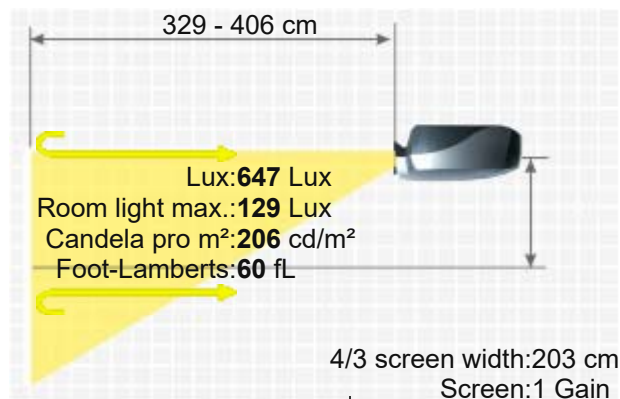

Audio in 1 x Audio Stereo (Miniklinke)
Audio out 1 x Audio Stereo (Cinch)



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
260W/ 6W Standby
210 x 86 x 285 mm (8,3"x3,4"x11,2") 5,15 L/dm³
32dB

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts

2,70 kg / 5,95 lbs.
Vert.: +/-15°
Hori.: +/-10°
70%
H-sync: 15-100 kHz
V-sync: 50-120 Hz
Range max.: 110 MHz
60 fL / max. 389 cm screen width
206 cd/m²


Features

- Freeze
- Blank (Black screen button)
- Kensington Slot
- Gamma correction
- Picture-in-Picture
- Remote control with laser pointer
- Digital Zoom 20x

Status

2003 Discontinued (EOL) // Last update of the data: 2023-08-04

Data

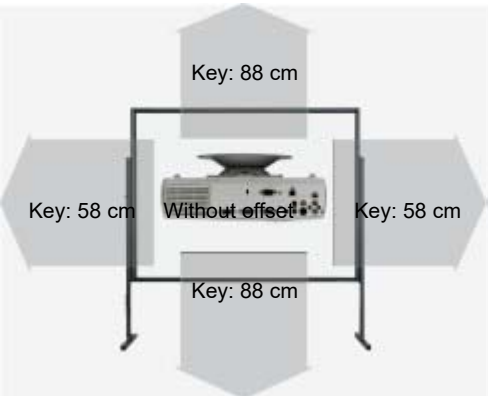

More Details



HCinema

<https://www.projector-database.com/pro/liesegangchelsea-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.