

# Liesegang Piccadilly plus

LIESEGGANG PICCADILLY PLUS



## Brief Introduction

Beta 2.5

A brief introduction to the Piccadilly plus: The Liesegang standard portable DLP projector offers 1500 Ansi lumens, a contrast of 1500:1 and an SVGA 800 x 600 resolution. An image width of up to 337 cm is possible. However, the image should be smaller in room light. We recommend max. 225 cm. The model was built by Liesegang in 2004 and is no longer current. It should also be noted that, unfortunately, there are no more replacement lamps for the projector, neither originals nor replicas.



1 x 0,55" DLP Chip  
SVGA 4/3 Ti Digital Light Processing Chip

## Display Type

Ansi-Lumen  
Contrast  
Black Level  
Offset

Projector 1500  
1500:1 full on/off  
1,0000 min. Lumen

Screen 500 Lux (bei 200 cm Screen)  
1500:1 full on/off  
0,334 min. Lumen

## Resolution

SVGA 800 x 600  
480.000 Pixel  
XGA 1024x768 compressed

## Video Modes

Pal, Secam, NTSC, HDTV

## Application

Standard-Portabel | External training and company presentations, as well as product presentations.

## Light Source

Small screen width, rooms with very little ambient light below 100 lumens.

## Light Life

200W P-VIP Lamp  
Articel Nr.: ZU 0216 04 4010  
2000 h.

## Operating Costs

-

## Focus

Manual

## Zoom

Manual 1,14

## Objective

F=2,6 f=19,3-22 mm

## Throw Ratio


1,73-1,97:1

## Audio

1 x 1W

## Connections

DVI-I in  
Cinch Video in  
S-Video in  
Mini Jack in  
USB

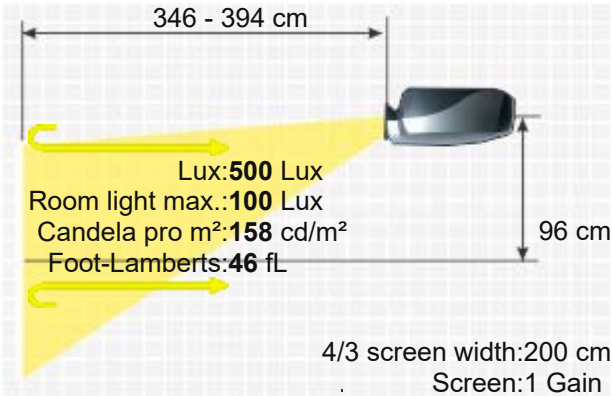



Ceiling Mounting  
Power  
Size WxHxD  
Operating Noise

Yes  
250W / 10W standby  
280 x 97 x 205 mm (11"x3,8"x8,1") 5,57 L/dm³  
32dB

Weight  
Keystone  
Illumination

2,00 kg / 4,41 lbs.  
Vert.: +/-15°  
80%

Frequenz

H-sync: 15-70 kHz  
V-sync: 43-85 Hz

Foot-Lamberts

46 fL / max. 337 cm screen width  
158 cd/m²

Features

- Freeze
- Kensington Slot
- Gamma correction
- Picture-in-Picture
- 16 times digital Zoom
- De-interlacer
- 

In Test

-

Status  
2004 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



# HCinema

<https://www.projector-database.com/pro/liesegangpiccadillyplus-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.