

Appotronics SU11KAS

APPOTRONICS SU11KAS



With the SU11KAS, manufacturer Appotronics offers a large-event DLP laser projector with WUXGA 1920 x 1200 resolution and a contrast ratio of 100000:1. Thanks to laser technology, the projector has a light life of up to 20,000 hours, which would be over 13.7 years if viewed for 4 hours a day. The integrated lens shift gives you freedom when setting up the projector. 11,000 ANSI lumens ensure that an image width of 1244 cm is also possible. The projector can handle rooms with residual light with a smaller image width; we would recommend a maximum of 829 cm. If the image is still too small, the integrated edge blending software can help to project a large image with additional projectors. Furthermore, the projector can play 1080P and 4K (compressed) without any problems.



1 x 0,8" DMD DLP Chip
WUXGA 16/9 Ti Digital Light Processing Chip

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Projector 11000 / 12000 Center Lumen

100000:1 full on/off

0,1100 min. Lumen

Vert.: +/-100% Hori.: +/-40%

WUXGA 1920 x 1200

2.304.000 Pixel

UHD (4K2K+) 3840 x 2400 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), EDTV 480p, 576p

Event | Very large screen width and rooms with plenty of light and shaded daylight.

ALPD 5.0 Full Color Laser

20000 h.

0,00 € Laser

Powered

Powered

optional

optional


-

2x HDMI2.0(4K/60P)
DVI-D, DP1.2 (4K/60P)
HDBaseT 1.0 (Optional9)
3D Syn 3D SYNC in
3D SYNC out
IR 3D out
MULT SYNC in und out
USB-A in
12V External Power Supply Port: Power 12V 1A

Screen 4889 Lux (200 cm Screen width)

100000:1 full on/off

0,049 min. Lumen

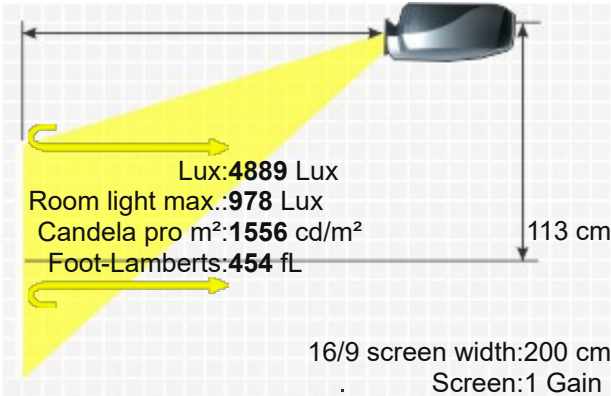

Ceiling Mounting RS232
Power RJ45 Lan
Size WxHxD Yes, is possible.
Operating Noise 700W Normal
537,5 x 190 x 510 mm (21,1"x7,5"x20,1") 52,04 L/dm³
37dB


Weight 28,40 kg / 61,73 lbs.
Keystone -
Illumination 92%

Frequenz -

Foot-Lamberts 454 fL / max. 1244 cm screen width
1556 cd/m²

- Full HD 1080P compatible
- Lens shift Funktion
- User logo
- Kensington Slot
- Warping
- Edge Blending
- Lan network compatible.
- Multi Point Keystone (33x33 Points)
- NFC Module

Screen Mirroring -

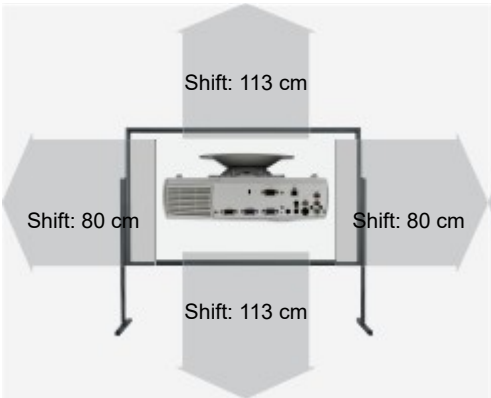

Optional accessories



Deckenhalterung Länge 225 mm

Halterung45

83,60 €

Optional Lenses



Name	Ratio	Distance	Shift V	Shift H	Zoom
XL380LA	3.8-6.8:1	760-1360 m			Powered
XL240LA	2.4-3.8:1	480-760 m			Powered
XL150MA	1.5-2.4:1	300-480 m			Powered
XL110MA	1.14-1.51:1	228-302 m			Powered
XL085FR	0.85-1.11:1	170-222 m			Powered
XL070FR	0.7-0.85:1	140-170 m			Powered
XL053FR	0.53-0.63:1	106-126 m			Powered
XL036FR	0.36:1	72 m			No Zoom

Status 2025 Current model // Last update of the data: 2026-01-26

Data



More Details



HCinema

<https://www.projector-database.com/pro/appotronicssu11kas-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.