

Liesegang Prime Time pro



LIESEGANG PRIME TIME PRO



The Liesegang Prime Time pro LCD projector has 1300 Ansi lumens, a contrast of 600:1 and an XGA 1024 x 768 resolution. The horizontal and vertical keystone correction provides leeway when setting up. An image width of up to 314 cm is possible as the projector has 1300 Ansi lumens. However, if room light is available, the picture should be max. 209 cm wide. The model was built by Liesegang in 2003 and is no longer current.

3 x 0,7" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector	1300	421 Lux (bei 203 cm Screen)
Contrast	600:1 full on/off	600:1 full on/off
Black Level Offset	2,1667 min. Lumen	0.705 min. Lumen

Resolution
XGA 1024 x 768
786.432 Pixel

Video Modes
SXGA 1280 x 1024 compressed

Application
PAL, NTSC, Secam HDTV

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source
150W AC Lamp

Article Nr.: ZU0202 04 4010

Light Life
2000 h.

Operating Costs
11,9% / 0,05 €

Focus
Manual

Zoom
Manual 1,2

Objective
F=2,0-2,4 f=21,2-25,4 mm

Throw Ratio
1,49-1,79:1

Audio
2W Mono

Connections
1 x RGB analog (D-Sub HD)
1 x USB
1 x RS232C
1 x Video (Cinch)
1 x S-Video (Mini-DIN)
1 x Composite (Cinch)
1 x Component (Cinch)
1 x Audio Stereo (Miniklinke)

Ceiling Mounting
Yes

Power
210W/ 10W Standby

Size WxHxD
280 x 70 x 200 mm (11"x2,8"x7,9") 3,92 L/dm³


Operating Noise
34dB

Weight
2,50 kg / 5,51 lbs.

Keystone
Vert.: +/-15°

Hori.: +/-15°

Illumination
90%

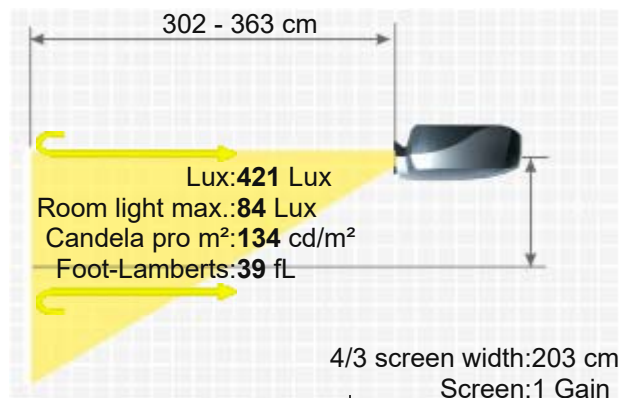

Frequenz
H-sync: 15-80 kHz
V-sync: 43-85 Hz
Range max.: 135 MHz

Foot-Lamberts
39 fL / max. 314 cm screen width

134 cd/m²

- Features
- Freeze
 - User logo
 - Kensington Slot
 - Gamma correction
 - Picture-in-Picture
 - Remote control with laser pointer und mouse control
 - Digital zoom 16x

Optional
Philips bulb only NLMP2189

Lamp original ZU0202 04 4010

Status
Data
Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n2190>
2003 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



HCinema

<https://www.projector-database.com/pro/liesegangprimetimepro-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.