

Medion MD 2980/A/DA



MEDION MD 2980/A/DA



Brief Introduction

Beta 2.5

The Medion MD 2980/A/DA DLP home cinema projector has 1000 Ansi lumens, a contrast of 1000:1 and an SVGA 800 x 600 resolution. The projector can illuminate a picture width of 275 cm well. However, if room light is available, the picture width should ideally not exceed 183 cm. The model was built by Medion in 2004 and is no longer current.

Display Type



1 x 0,55" DLP Chip
SVGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 1000 Screen 324 Lux (bei 203 cm Screen)

Contrast

1000:1 full on/off 1000:1 full on/off

Black Level

Offset 1,0000 min. Lumen 0.325 min. Lumen

Resolution

SVGA 800 x 600

480.000 Pixel

XGA 1024 x 768 compressed

Video Modes

PAL/SECAM/NTSC/NTSC4.43/PAL-M/N HDTV 1080i 720p EDTV 480p 576p

Disc Recognition

DVD | HD Blu-ray (komprimiert) | 3D Blu-ray | 4K UHD Blu-ray

Application

Homecinema | Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

150W P-VIP Lamp

Light Life

Articel Nr.: NLMPf21023

1500 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,14

Objective

F=2,6 f=19,3-22 mm

Throw Ratio

1,7-2,0:1

Audio

1 x 1W Mono

Connections

DVI-I in
Cinch Video in
S-Video in
Mini Jack in



Ceiling Mounting

Yes

Power


220W / 10W standby

Size WxHxD

200 x 97 x 280 mm (7,9"x3,8"x11") 5,43 L/dm³

Operating Noise

-

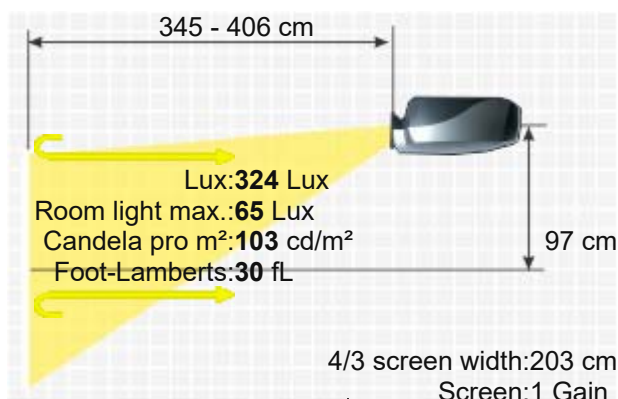

Weight

2,10 kg / 4,63 lbs.

Keystone

Vert.: +/-15°

Illumination

-

Frequenz
H-sync: 15-80 kHz
V-sync: 50-100 Hz

Foot-Lamberts
30 fL / max. 275 cm screen width

103 cd/m²

- Features
- Freeze
 - Kensington Slot
 - Gamma correction
 - Picture-in-Picture
 - Remote control with backlight
 - 16x digital zoom

Status
Data
2004 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



HCinema

<https://www.projector-database.com/pro/medionmd2980a-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.