

Mitsubishi HC5



MITSUBISHI HC5



Brief Introduction

Beta 2.5

A brief introduction to the Mitsubishi HC5. The home cinema SXR projector has an HDTV 1920 x 1080 resolution and a contrast of 140000:1. The lamp is specified with a lamp life of 4000 hours, which converts to over 5.5 years at 2 hours per day. The built-in lens shift and keystone correction function provides freedom when setting up. Thanks to the brightness of 1100 Ansi lumens, a picture width of 337 cm is possible. In room light, the picture should be max. 225 cm wide. Video signals 1080P and 3D are also no problem for the projector. The model was built by Mitsubishi in 2012 and is no longer current, but is still one of the very popular projectors.

Display Type

3 x 0,61" SXR Panel
HDTV 16/9 Silicon X-tal Reflective Display (SXR)

Ansi-Lumen

1100 489 Lux (bei 200 cm Screen)

Contrast

140000:1 full on/off 140000:1 full on/off

Black Level

0,0079 min. Lumen 0,003 min. Lumen

Lens shift

Vert.: +/-100% Hori.: +/-45%

Resolution

HDTV 1920 x 1080
2.073.600 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

Disc Recognition

DVD | HD Blu-ray | 3D Blu-ray | 4K UHD Blu-ray

3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Application

Homecinema | Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

230W Lamp
Articel Nr.: VLT-HC9000LP

Light Life

4000 h. in Eco Mode

Operating Costs

8,22% / 0,06 €

Focus

Powered

Zoom

Powered 1,8

Objective

F=3,2-3,9 f=21,4-38,5 mm

Throw Ratio

1,59-2,86:1

Audio

-

Connections

2 x HDMI in
D-sub 15 pin in
S-Video in
Cinch Video in
RS232C Din 9 pin in
2 x 12V Trigger out



Ceiling Mounting

Yes

Power

350W

Size WxHxD


480 x 210,7 x 529 mm (18,9"x8,3"x20,8") 53,32 L/dm³

Operating Noise

-

Weight

14,50 kg / 31,97 lbs.

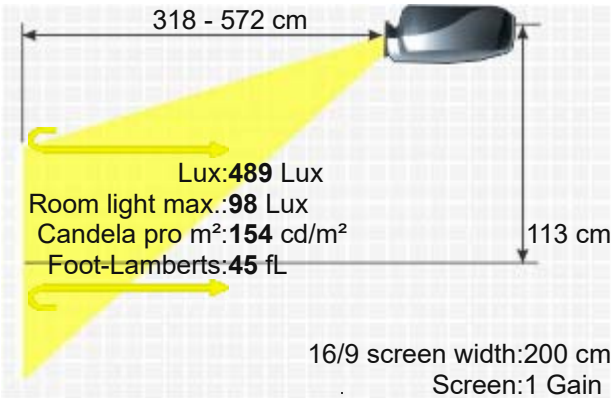

| | |
|-----------------------|--|
| Keystone Illumination | Vert.: +/-15° - |
| Frequenz | H-sync: 15-85 kHz V-sync: 24-85 Hz |
| Foot-Lamberts | 45 fL / max. 337 cm screen width 154 cd/m² |
| Features | <div> <div>■</div>Real Full HD 3D <div>■</div>Full HD 1080P compatible <div>■</div>Lens shift Funktion <div>■</div>Eco Mode <div>■</div>Remote control with backlight </div> |
| Status Data | 2012 Discontinued (EOL) // Last update of the data: 2023-08-04 |



More Details



HCinema

<https://www.projector-database.com/pro/mitsubishihc5-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.