

# Mitsubishi TW21U



MITSUBISHI TW21U



## Brief Introduction

Beta 2.5

A brief introduction to the TW21U: The Mitsubishi 3D DLP projector offers 3500 Ansi lumens, a contrast of 3000:1 and a WXGA 1280 x 800 resolution. An image width of up to 601 cm is possible, if the image width is smaller (we recommend max. 401 cm), rooms with residual light are also no problem. Furthermore, the projector can play 1080P and 3D without any problems. The model was built by Mitsubishi in 2013 and is no longer current. It should also be noted that there are unfortunately no more replacement lamps for the projector, neither originals nor replicas.



1 x 0,65" DDP4421 LVDS DLP Chip

WXGA 16/10 Ti Digital Light Processing Chip

## Display Type

### Ansi-Lumen

### Contrast

### Black Level

### Offset

3500

3000:1 full on/off

1,1667 min. Lumen

1400 Lux (bei 200 cm Screen)

3000:1 full on/off

0,467 min. Lumen

## Resolution

WXGA 1280 x 800

1.024.000 Pixel

UXGA 1600 x 1200 compressed

## Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

## 3D Compatibility

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

## Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

## Light Source

240 / 170W im Eco Mode Lamp

Articel Nr.: VLT-TX20LP

## Light Life

3000 h. 6000 h. in eco Mode

## Operating Costs

-

## Focus

Manual

## Zoom

Manual 1,27

## Objective

F=2,6-2,9 f=21,0-25,6 mm

## Throw Ratio

1,5-1,9:1

## Audio

16W Mono

2 x HDMI in

D-sub 15pin in und out

Cinch Video in

S-Video in

Mini Jack Audio in und out

USB Typ A, B in

## Connections

RS232C Din 9 pin in

RJ45 in



## Ceiling Mounting


Yes

## Power

-

## Size WxHxD

319 x 103 x 224 mm (12,6"x4,1"x8,8") 7,36 L/dm³

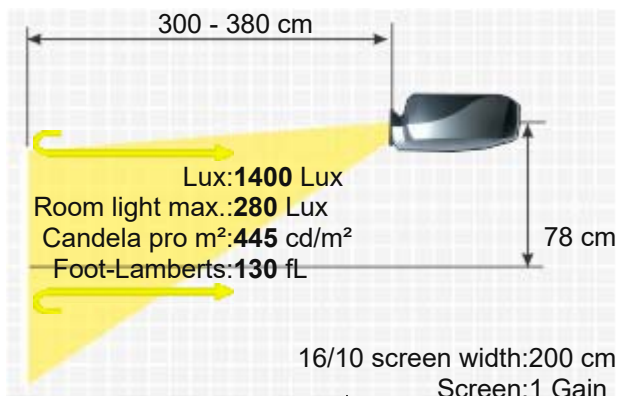

Operating Noise 32 / 25 dB in Eco Mode

Weight 2,80 kg / 6,17 lbs.  
Keystone Vert.: +/-20°  
Illumination -  
Frequenz H-sync: 15-105 kHz  
V-sync: 50-120 Hz  
Range max.: 165 MHz  
Foot-Lamberts 130 fL / max. 601 cm screen width  
445 cd/m²

- Features
- Real Full HD 3D
  - Full HD 1080P compatible
  - Eco Mode
  - Kensington Slot
  - Lan network compatible.
  - Crestron®-Software compatible.

Status 2013 Discontinued (EOL) // Last update of the data: 2023-08-04  
Data Created: 2013-08-19 13:58:38



More Details

**HCinema**  
<https://www.projector-database.com/pro/mitsubishitw21u-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.