

Nec M230X

NEC M230X



Brief Introduction

Beta 2.5

The Nec model M230X is an LCD projector with XGA 1024 x 768 resolution and a contrast of 2000:1. The manufacturer specifies a lamp life of 5000 hours, which is over 6.8 years if enjoyed for two hours a day. The integrated media player can play files directly. 2300 Ansi lumens ensure that a picture width of 418 cm is also possible. However, if room light is available, the picture should be max. 279 cm wide. The model was built by Nec in 2010 and is no longer current.

Display Type

3 x 0,63" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

2300

767 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

1,1500 min. Lumen

0,384 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Media player formats: JPEG

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Light Source

185 / 145W im Eco Mode Lamp

Light Life

Articel Nr.: NP15LP

5000 h. 6000 h. in Eco Mode

Operating Costs

9,52% / 0,04 €

Focus

Manual

Zoom

Manual 1,69

Objective

F=1,7-2,1 f=17,5-29 mm

Throw Ratio

1,3-2,2:1

Audio

1 x 10W

Connections

HDmi in

D-sub 15 pin in und out

S-Video in


Cinch Video in

Mini Jack Audio in und out

RS232C Din 9 pin in

RJ45 in

USB Typ A,B

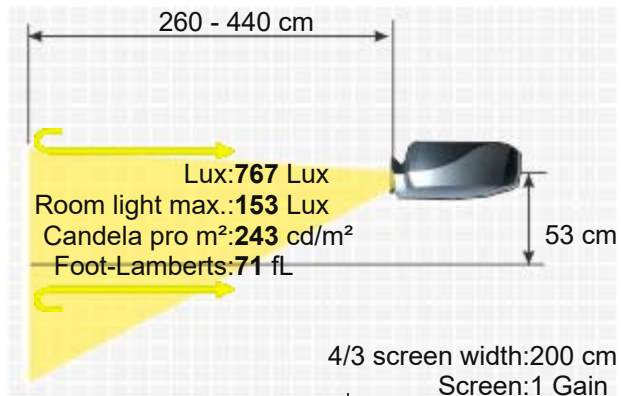

Ceiling Mounting Yes
Power 239 / 193W in Eco Mode
Size WxHxD 339 x 99 x 257 mm (13,3"x3,9"x10,1") 8,63 L/dm³
Operating Noise 34 / 27 dB in Eco Mode

Weight 2,90 kg / 6,39 lbs.
Keystone Vert.: +/-30° automatisch
Illumination -


Frequenz H-sync: 15-100 kHz
V-sync: 50-120 Hz

Foot-Lamberts 71 fL / max. 418 cm screen width
243 cd/m²

- Direkt Power Off
- Integrated Mediaplayer
- Freeze
- Blackboard Modus
- User logo
- Eco Mode
- Automatic and manual vertical keystone correction
- Kensington Slot
- Password protection
- Remote control with mouse control
- PJLink™
- Lan network compatible.
-

Optional	Bulb only	NLMP19789
	Lamp ruby	Ruby-LMP19789
	Lamp incl. air filter original	NP15LP / 60003121
	Compatible lamp	LMP-K19787
	Remote control original	Alternative zu:7N900921 / 7N900927 / RD-448E
	Air filter package original	24J37801 & 24J37811 & 24J37821 & 24J37831
	Ceiling Mount 100-120	Halterung100

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n19787>
2010 Discontinued (EOL) // Last update of the data: 2023-08-04

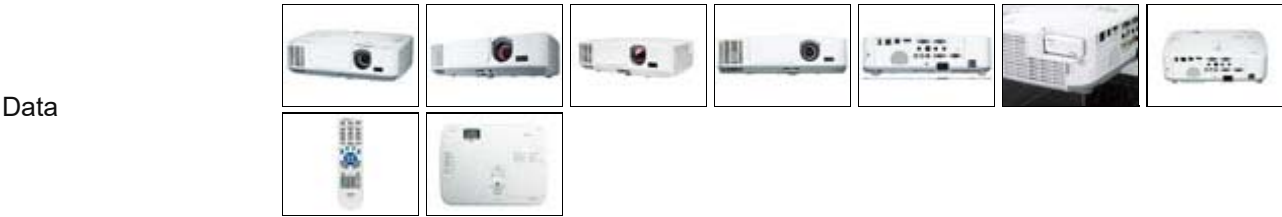

HCinema

<https://www.projector-database.com/pro/necm230x-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

