MULTI PROJECTOR

MP-50E

Avio



Inspired Impact with Every Presentation

Flexibility, quality and high performance are words that have become synonymous with the Avio solid object/multimedia projectors. This tradition is continued with the new Avio MP-50E solid object/multimedia projector. This multi-function, five-in-one projector combines a standard data projector and a document camera into a single integrated projection package. This configuration allows for the projection of documents/photographs, 3D solid objects, transparencies, data (PC/MAC images) and video (RCA/SVHS/DVD) from one compact package. Performing at 3000 ANSI Lumens of brightness, and with a 2 million pixel CCD camera, the MP-50E gives any presenter the ability to deliver a clear and detailed presentation to audiences of all sizes. The MP-50E has all the tools and presentation support functions needed to make a creative and audience captivating event for every meeting or presentation.

MP-50E features

- 3,000 ANSI Lumens
- 2-Million-Pixel CCD Camera
- Native Resolution (XGA), (UXGA) Compatible
- OHP and PC : 6.25X zoom
- Keystone Correction
- Document Rotation Capability
- Stores up to 8 documents
- 7.3Kg(Approx.16.1lbs)

Simple, versatile presentation support

Advanced OHP features allow the presenter to integrate a diverse array of documents and solid objects into the presentation.Simple control of these features allows for the presenter to efficiently add flair and professionalism to any presentation.



■ *Document rotation and zoom function*

A4 size



rotation




Allows you to rotate documents vertically, horizontally or a full 180 degrees.

zoom



Provides up to 6.25X zoom.

■ *Keystone correction*

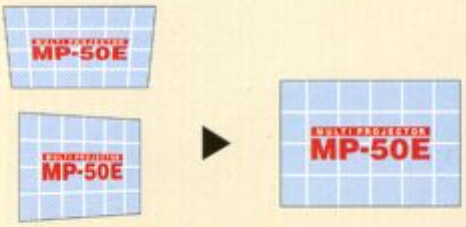

Vertical and horizontal image correction (horizontal ±10°, vertical ±15°) make it possible to project images from an indirect angle.

■ *Stores up to eight documents in memory*



The MP-50E stores up to eight documents in its built-in memory.

MP-50E Specifications

Panel Type		1.0-inch TFT LCD x 3 pieces, aspect ratio 4:3
Resolution		XGA (1,024 x 768)
PC Compatibility		VGA to UXGA
Projection Lens		Manual zoom (1 – 1.25 times)
Light Source		260W super-high-pressure mercury lamp
Screen Size		Min. 32 inches – Max. 300 inches (projection distance 1.4m – 13.9m)
Color Reproducibility		Full color (16.77 million colors)
Light Output/Center to Edge		3,000 ANSI lumens
Sound Output		1W x 1W stereo speakers
Compatible Scanning Frequency	**Horizontal**	21 – 80KHz
	Vertical	50 – 85Hz
Keystone Correction		Adjustable holizontal ±10°,vertical ±15°
Analog RGB Input/Output	**Input Terminal (Image)**	Mini D-sub 15 pins x 2
	Output Terminal (Image)	Mini D-sub 15 pins x 1
	Input Terminal (Sound)	Stereo mini-jack x 2
	Output Terminal (Sound)	Stereo mini-jack x 1
Video Input/Output	**Input Signal Type**	NTSC, PAL, SECAM
	Input Terminal (Image)	RCA pin x 1, S-Video terminal (Mini DIN 4 pins x 1)
	Input Terminal (Sound)	RCA pin (L/R) x 1
Operational Environment		Temperature 0 – 35°C, humidity 20 – 80% (no condensation)
Input Power		100-120 VAC/220-240 VAC
Power Consumption		390W
External Dimensions		400(W) x 315(D) x 145(H)mm excluding projected section
Weight		7.3kg (approx. 16.1 lbs.)
Standard Accessories		Power cable (3m), Personal computer interface cable,(2m, Mini D-sub 15 pins), Remote controller, Lens cover, Instruction manual, Batteries (AA x 2),
Document Camera		1/2-inch color CCD 2,000,000 pixels
	Zoom	6.25X zoom
	Resolution	760 TV lines (horizontal resolution)

Note: Design and specifications are subject to change without notice.

Avio

NIPPON AVIONICS CO.,LTD.

Overseas Department

20-1, Nishi-Shinbashi 3-chome, Minato-ku Tokyo 105-0003, Japan
Phone: 81-3-5401-7386 Fax: 81-3-5401-7344
URL http://www.avio.co.jp/

Printed in Japan

420-175-E 0303-150-KLR1