

Nec M311X

N E C M 3 1 1 X



Brief Introduction

Beta 2.5

A brief introduction to the M311X: The Nec LCD projector offers 3100 Ansi-Lumen, a contrast of 3000:1 and an XGA 1024 x 768 resolution. The lamp life is up to 10000 hours, which is over 13.7 years with a daily viewing time of 2 hours. The integrated media player can play files directly. An image width of up to 485 cm is possible as the projector has 3100 Ansi lumens. However, if room light is available, the image should be a maximum of 323 cm wide. Playing 1080P is also no problem for the projector. The model was built by Nec in 2012 and is no longer current.

Display Type

3 x 0,63" LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen

3100 / 1860 im Eco Mode

1033 Lux (200 cm Screen width)

Contrast

3000:1 full on/off

3000:1 full on/off

Black Level

1,0333 min. Lumen

0,345 min. Lumen

Offset

Resolution

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Media player formats: JPEG

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

180 / 110W im Eco Mode Lamp

Article Nr.: NP15LP / 60003121

Light Life

5000 h. 10000 h. in Eco Mode

Operating Costs

10% / 0,04 €

Focus

Manual

Zoom

Manual 1,69

Objective

F=1,7-2,1 f=17,5-29 mm

Throw Ratio

1,3-2,2:1

Audio

1 x 10W

Connections


HDMI in

D-sub 15 pin in und out

S-Video in

Cinch Video in

Mini Jack Audio in und out

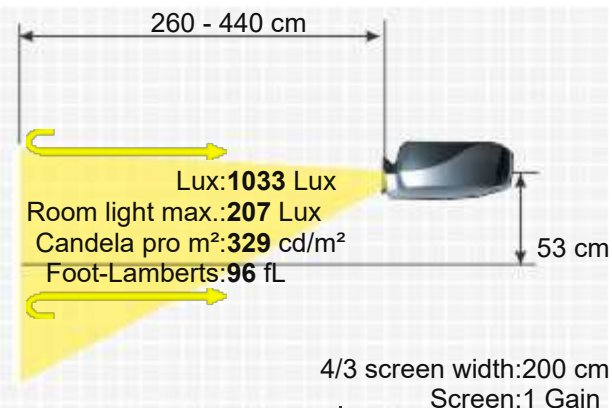

RS232C Din 9 pin in
RJ45 in
USB Typ A,B



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
239W
339 x 99 x 257 mm (13,3"x3,9"x10,1") 8,63 L/dm³
33 / 26 dB in Eco Mode

Weight
Keystone
Illumination

2,90 kg / 6,39 lbs.
Vert.: +/-30° automatisch
-

Frequenz

H-sync: 15-100 kHz
V-sync: 50-120 Hz

Foot-Lamberts


96 fL / max. 485 cm screen width
329 cd/m²

- Full HD 1080P compatible
- Direkt Power Off
- Integrated Mediaplayer
- Freeze
- Blackboard Modus
- User logo
- Eco Mode
- Automatic and manual vertical keystone correction
- Kensington Slot
- Password protection
- Remote control with mouse control
- PJLink™
- Lan network compatible.
-

Features

Screen Mirroring

-

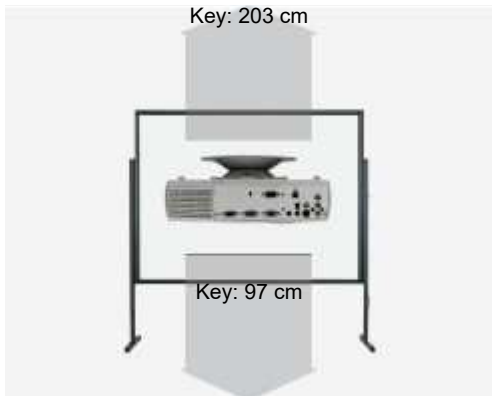

Optional accessories

	Nackte Lampe	NLMP19789	70,22 €
	Lampe Ruby	Ruby-LMP19789	95,59 €
	Lampe inkl. Luftfilter Original	NP15LP / 60003121	203,91 €
	Kompatible Lampe	LMP-K19787	69,20 €
	Fernbedienung Original	Alternative zu: 7N900921 / 7N900927 / RD-448E	24,01 €
	Luftfilter Paket Original	24J37801 & 24J37811 & 24J37821 & 24J37831	28,86 €
	Lampe inkl. Luftfilter B-Ware	NP15LP / 60003121	290,75 €
	Deckenhalterung 100-120	Halterung100	47,86 €

Status
Data

2012 Discontinued (EOL) // Last update of the data: 2026-06-09
Created: 2012-10-31 14:23:09





HCinema

<https://www.projector-database.com/pro/necm311x-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.