

Nec P401W

NEC P401W



The Nec P401W LCD projector has 4000 Ansi lumens, a contrast of 4000:1 and a WXGA 1280 x 800 resolution. The lamp life is up to 4000 hours, which is equivalent to over 5.5 years at 2 hours per day. The projector also offers an integrated media player that can be used to play files directly. Including a lens shift and keystone correction function, which provides freedom during installation. A picture width of up to 643 cm is possible, if the picture width is smaller (we recommend max. 429 cm), rooms with residual light are also no problem. Even 1080P video signals are no problem for the projector. The model was built by Nec in 2013 and is no longer current.

Brief Introduction

Beta 2.5

Display Type



3 x 0,59" LCD TFT Panel mit MLA
WXGA 16/10 Liquid Crystal Display with Micro Lense Array

Ansi-Lumen

Projector 4000

Screen 1600 Lux (bei 200 cm Screen)

Contrast

Projector 4000:1 full on/off

Screen 4000:1 full on/off

Black Level

Projector 1,0000 min. Lumen

Screen 0,4 min. Lumen

Lens shift

Projector Vert.: +60% -0%

Resolution

Projector WXGA 1280 x 800

1.024.000 Pixel

UXGA 1600 x 1200 compressed

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Media player formats: .JPEGs

Standard-Portabel | External training and company presentations, as well as product presentations.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

240W Lamp

Articel Nr.: NP23LP

Light Life

4000 h. 6000 h. in Eco Mode

Operating Costs

14,29% / 0,06 €

Focus

Manual

Zoom

Manual 1,69

Objective

F=1,7-2,0 f=17,4-29,0 mm

Throw Ratio


1,3-2,2:1

Audio

16W

Connections

2 x HDMI in
D-sub 15 pin in und out
S-Video in
Cinch Video in

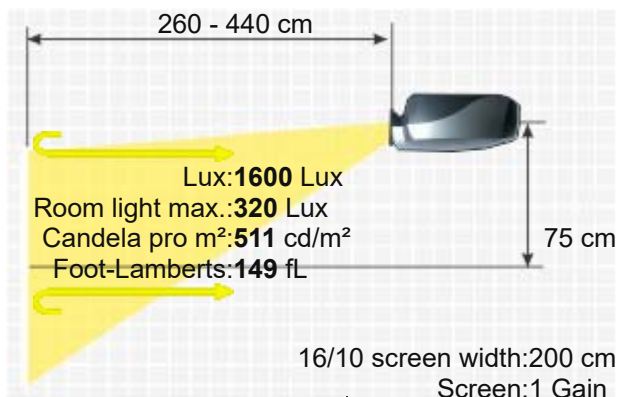

Cinch Stereo in
USB Typ A
RS232C Din 9 pin in
Mini Jack Audio in und out
RJ45 in
Ceiling Mounting Yes
Power 325W
Size WxHxD 398 x 127 x 282 mm (15,7"x5"x11,1") 14,25 L/dm³
Operating Noise 36 / 30 dB in Eco Mode

Weight 4,10 kg / 9,04 lbs.
Keystone Vert.: +/-30°
Hori.: +/-30°
Illumination -

Frequenz H-sync: 15-100 kHz
V-sync: 50-120 Hz

Foot-Lamberts 149 fL / max. 643 cm screen width
511 cd/m²

- Full HD 1080P compatible
- Lens shift Funktion
- Integrated Mediaplayer
- Freeze
- Blackboard Modus
- Eco Mode
- Kensington Slot
- Lan network compatible.
- Crestron®-Software compatible.
-

Optional
Lamp original NP23LP / 100013284
Remote control original NP03CV / 100013351
Remote control original Alternative zu: 7N900921 / 7N900927 / RD-448E
Air filter package original 24J37801 & 24J37811 & 24J37821 & 24J37831

Status
Order here: <https://www.hcinema.de/lampen/shop-en.php?id=21854>
2013 Discontinued (EOL) // Last update of the data: 2023-08-04
Created: 2013-04-16 14:36:55



More Details



<https://www.projector-database.com/pro/necnpp401w-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

