Avio

MULTI PROJECTOR

MP-700E/MP-50E

Inspired Impact with Every Presentation

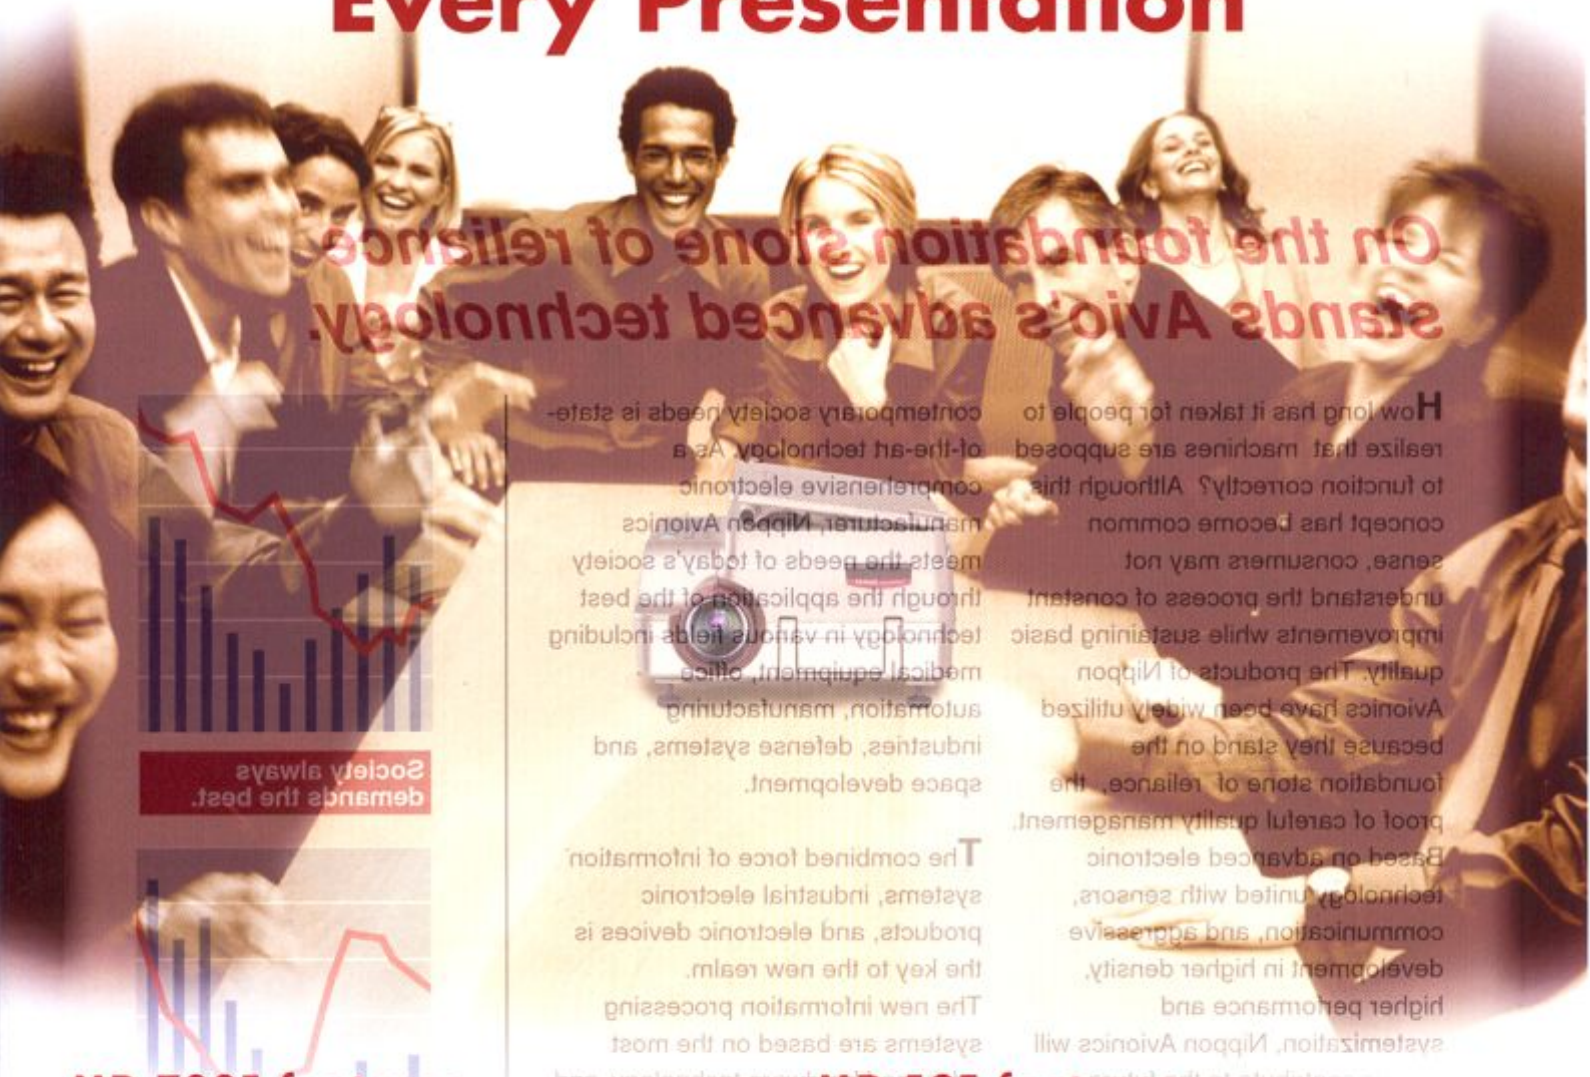

MP-700E features

- 4,300 ANSI Lumens
- 2-Million-Pixel CCD Camera
- Native Resolution (XGA),(UXGA) Compatible
- OHP and PC : 6.25X zoom
- Keystone Correction
- Document Rotation Capability
- Compact Flash Card Slot
- 8.5Kg(Approx.18.9lbs)

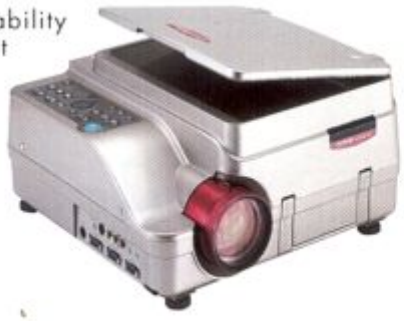

MP-50E features

- 3,000 ANSI Lumens
- 2-Million-Pixel CCD Camera
- Native Resolution (XGA),(UXGA) Compatible
- OHP and PC : 6.25X zoom
- Keystone Correction
- Document Rotation Capability
- Stores up to 8 documents
- 7.3Kg(Approx.16.1lbs)



Maximize Meeting Flexibility and Innovation with Multifunctional Avio MP Unit

- State-of-the-art businesses need state-of-the-art equipment at their facilities
- The multifunctional Avio MP Unit is a tool to maximize the sharing of various media
- Documents, photographs, 3D objects, transparencies, PC/MAC computer images and video can each be projected onto a wall or screen by any Avio MP Unit
- Meeting participation is maximized as any attendee can immediately share his or her notes and materials with the other meeting participants
- The Avio MP Unit allows meetings to become vibrant, creative and innovative by making presentation of virtually any media possible

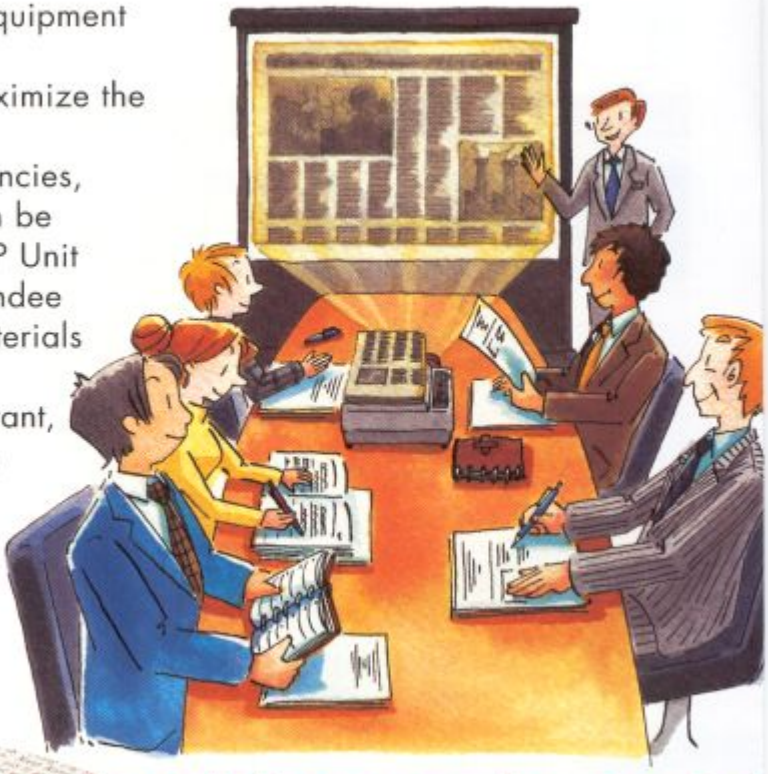

Documents/Photographs, 3D Sol Can Be Projected

2 Million-pixel CCD Cam

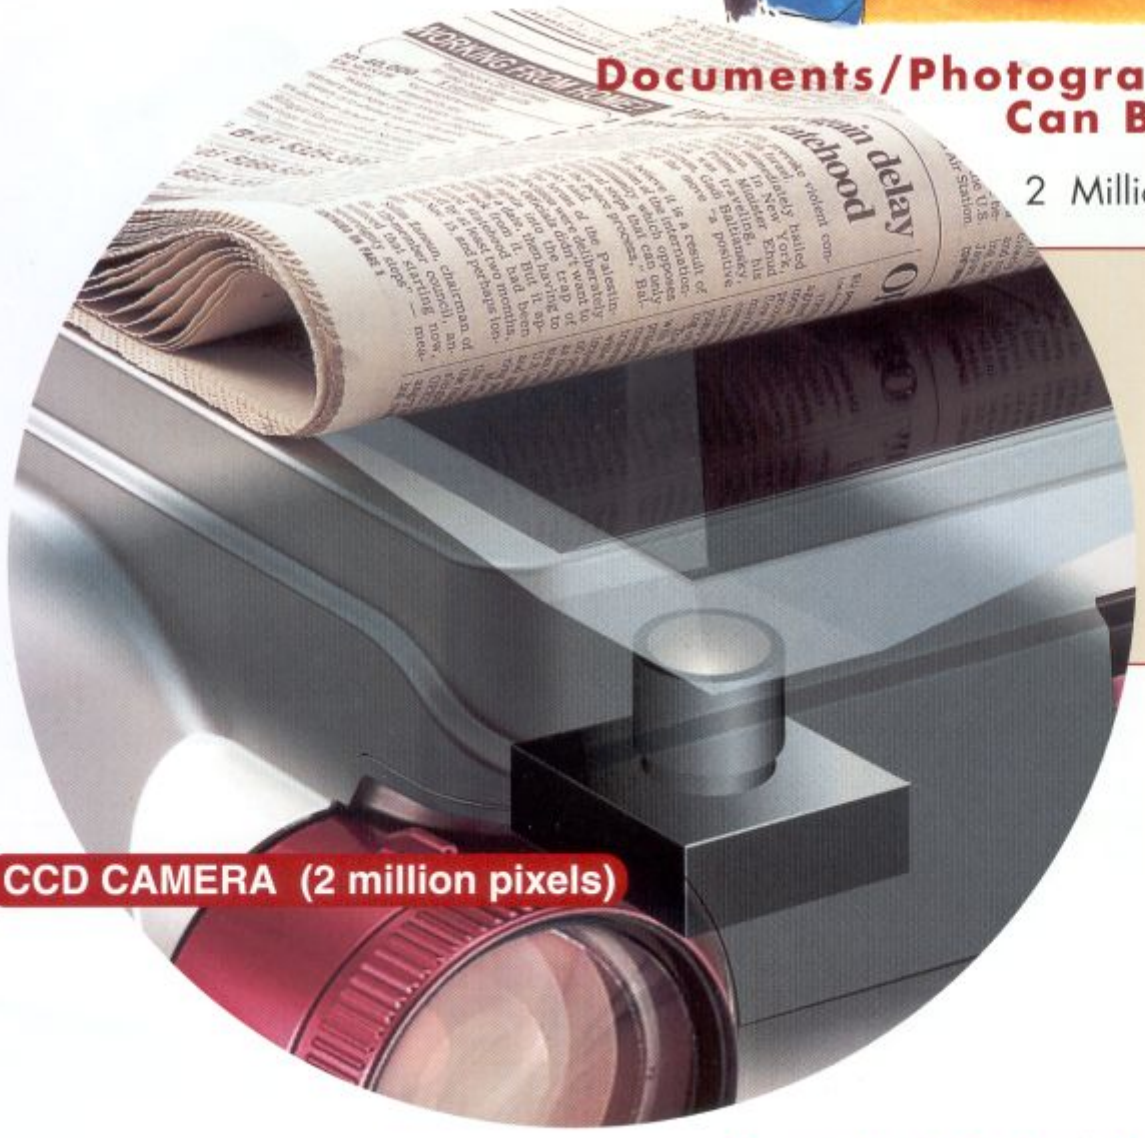

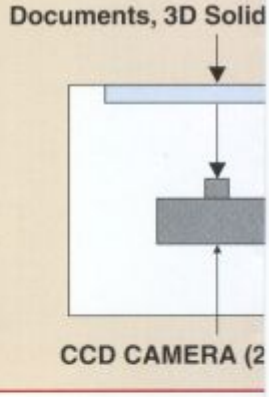



Remote Controller Assists Your Presentation

Captivate Students by Integrating Multiple Media Sources into the Classroom Presentation

- Today's students live with diverse media
- Computer software, video, DVDs, TV and many other sources constantly captivate students' attention
- Ways of educating students must compete with these outside sources at a comparable level
- The Avio MP Unit allows virtually any media to be presented in the classroom
- Documents, photographs, 3D objects, transparencies, PC/MAC computer images and video can each be projected onto a wall or screen by any Avio MP Unit
- Changing over media and captivating students' attention are accomplished at a push of a button
- The multifunctionality of the Avio MP Unit allows students to use various media in their expressions and presentations, and to make them more creative and visual
- The Avio MP Unit gives teachers the ability to captivate students' attention by integrating virtually any media into the classroom presentation

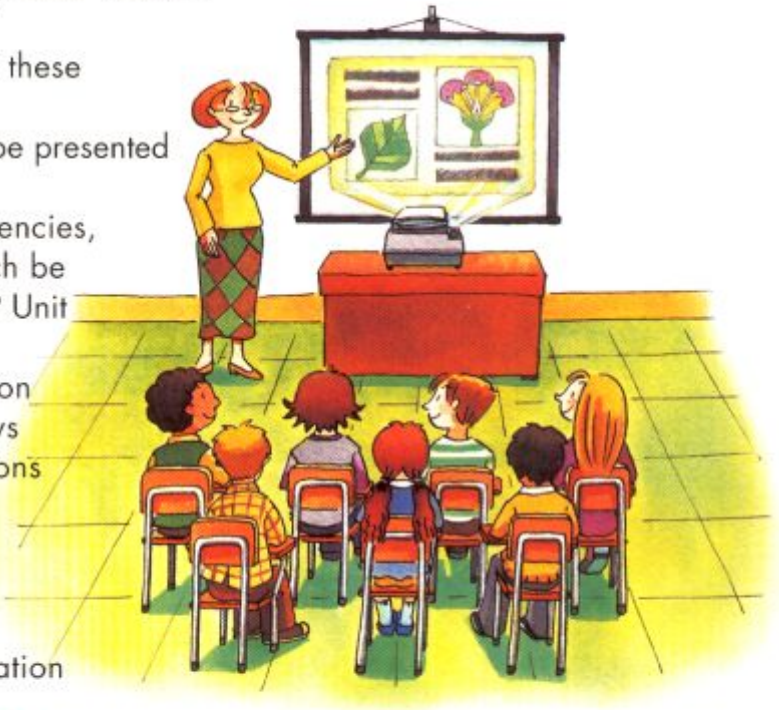

id Objects, and Transparencies as They Are

era Produces High-quality Images



Everyone Joins the Presentation and Focuses on the Presentation

The Avio MP Unit Accepts a Wide Range of Presentation Materials

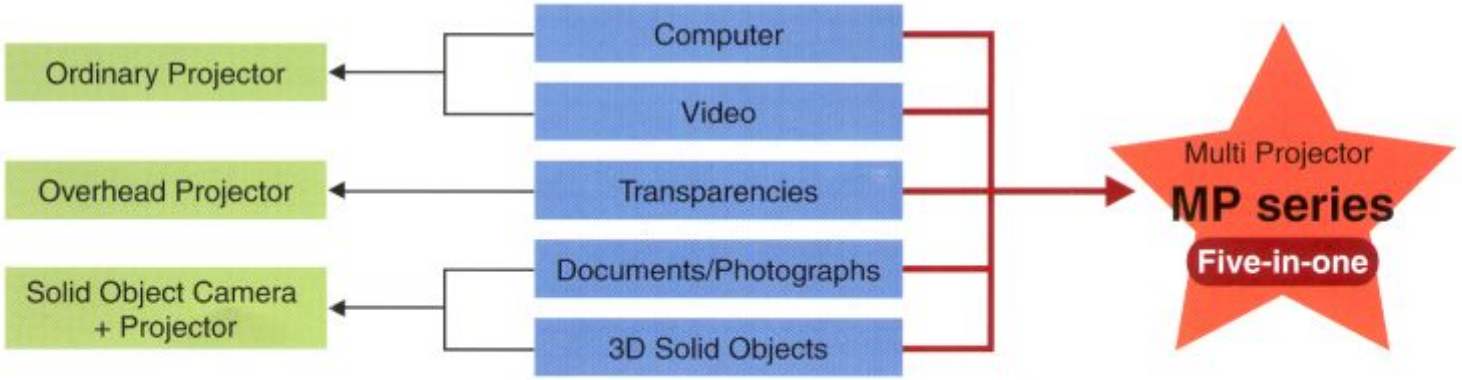

Simple, versatile presentation support

Advanced OHP features allow the presenter to integrate a diverse array of documents and solid objects into the presentation. Simple control of these features allows for the presenter to efficiently add flair and professionalism to any presentation.

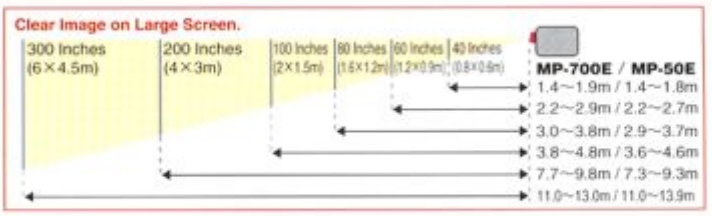

■ *Document rotation and zoom function*

A4 size



rotation



Allows you to rotate documents vertically, horizontally or a full 180 degrees.

zoom



Provides up to 6.25X zoom.

■ *Keystone correction*



Vertical and horizontal image correction (horizontal ±10°, vertical ±15°) make it possible to project images from an indirect angle.

■ *Store up to eight documents in memory or on compact flash card (only MP-700E)*

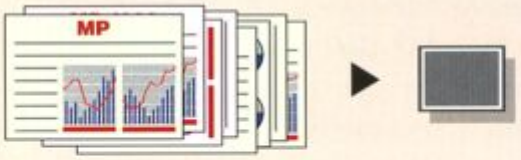

The MP-700E/MP-50E store up to eight documents in its built-in memory. The MP-700E stores projected image data to a compact flash card.

Specifications

		MP-700E	MP-50E
Panel Type		1.3-inch TFT LCD x 3 pieces, aspect ratio 4:3	1.0-inch TFT LCD x 3 pieces, aspect ratio 4:3
Resolution		XGA (1,024 x 768)	
PC Compatibility		VGA to UXGA	
Projection Lens		Manual zoom (1 – 1.3 times)	Manual zoom (1 – 1.25 times)
Light Source		300W super-high-pressure mercury lamp	260W super-high-pressure mercury lamp
Screen Size		Min. 32 inches – Max. 300 inches (projection distance 1.4m – 13m)	Min. 32 inches – Max. 300 inches (projection distance 1.4m – 13.9m)
Color Reproducibility		Full color (16.77 million colors)	
Light Output		4,300 ANSI lumens	3,000 ANSI lumens
Sound Output		2W x 2W stereo speakers	1W x 1W stereo speakers
Compatible Scanning Frequency	Horizontal	21 – 80KHz	
	Vertical	50 – 85Hz	
Keystone Correction		Adjustable holizontal ±10°, vertical ±15°	
Analog RGB Input/Output	Input Terminal (Image)	Mini D-sub 15 pins x 2	
	Output Terminal (Image)	Mini D-sub 15 pins x 1	
	Input Terminal (Sound)	Stereo mini-jack x 2	
	Output Terminal (Sound)	Stereo mini-jack x 1	
Video Input/Output	Input Signal Type	NTSC, PAL, SECAM	
	Input Terminal (Image)	RCA pin x 1, S-Video terminal (Mini DIN 4 pins x 1)	
	Input Terminal (Sound)	RCA pin (L/R) x 1	
Operational Environment		Temperature 0 – 35°C, humidity 20 – 80% (no condensation)	
Input Power		100-120 VAC/220-240 VAC	
Power Consumption		450W	390W
External Dimensions		390(W) x 380(D) x 190(H)mm excluding projected section	400(W) x 315(D) x 145(H)mm excluding projected section
Weight		8.5kg (approx. 18.9 lbs.)	7.3kg (approx. 16.1 lbs.)
Standard Accessories		Power cable (3m), Personal computer interface cable (2m, Mini D-sub 15 pins), Remote controller, Lens cover, Compact Flash Card (32MB), CF adapter, Instruction manual, Batteries (AA x 2),	Power cable (3m), Personal computer interface cable (2m, Mini D-sub 15 pins), Remote controller, Lens cover, Instruction manual, Batteries (AA x 2),
Document Camera		1/2-inch color CCD 2,000,000 pixels	
	Zoom	6.25X zoom	
	Resolution	760 TV lines (horizontal resolution)	

Note: Design and specifications are subject to change without notice.

Avio

NIPPON AVIONICS CO.,LTD.

Overseas Department

20-1, Nishi-Shinbashi 3-chome, Minato-ku Tokyo 105-0003, Japan
Phone: 81-3-5401-7386 Fax: 81-3-5401-7344
URL http://www.avio.co.jp/

Printed in Japan

420-186-E 0308-100-KLRv1